

delvo

GENERAL CATALOG

**SINTAER**

C/Montserrat nº 100 local.

08760 - Martorell

Tel. +34 937 736 633

www.sintaer.com

Nitto Kohki's "**delvo**" contributes to improvement of assembly quality.



"delvo", a screwdriver that realizes high precision torque management

Products with high reliability are born only with reliable tools.

High Precision

A high precision torque is a must to improve assembly quality. "delvo" has high repeatable torque accuracy, and it is possible to equalize the tightening torque.

Long Life

"delvo" with brush motor uses a long life motor that withstands a guaranteed fastening cycle of a million times. "delvo" with brushless motor are eco-friendly and maintenance free that realize high durability.

Shockless

Original clutch and motor stop mechanism minimizes the shock at the end of the screw fastening. It reduces the fatigue of screw fastening.



NITTO KOHKI has made every effort in environmental improvement schemes on a company-wide basis through the implementation of ISO14001 to execute environmentally conscious business activities. As a part of our ongoing commitment to improve the environment, we are also committed to exclude or reduce restricted chemical substances in our products, as designated by the RoHS directives and Laws and Regulations of Chemical Substances in Japan. For further details, please see the following:

Nitto Kohki group companies' Green Procurement Guidelines have been established by their environmental committee which consists of members from all the Nitto Kohki group of companies. Nitto Kohki group companies give preferential treatment to suppliers that work to an environmental policy framework. Nitto Kohki group companies periodically survey their suppliers to ensure their chemical management systems include the monitoring of environmental issues such as the RoHS directives, and Japanese laws and regulations of Chemical Substances to minimize packaging and waste. We are continuing our goal to ensure that our made-to-order items are also covered by our environmental policy.

Green Procurement Policy

Each of the Nitto Kohki group companies is clarifying the control categories of the environmental management substances included in the parts and auxiliary materials constituting Nitto Kohki products and those of the environmental management substances used in the manufacturing processes. We will promote prohibition and reduction of use of the environmental management substances according to such control categories. Through these activities, we will comply with various laws and regulations related to the environmental management substances and reduce the impact to the global environmental conservation and to the ecological system.

Scope of Application

Our Green Procurement Guideline applies to all materials, parts, products, and auxiliary materials which Nitto Kohki Group companies purchase for production or sales.

Our Green Procurement Activities

NITTO KOHKI group companies continually aim to comply with RoHS directives, and Japanese laws and regulations of Chemical Substances.

- Standard products have been RoHS compliant. Green procurement activities on made-to-order products are continuing.
- NITTO KOHKI group companies are now working to the REACH Regulation.
- NITTO KOHKI group companies are building a database of the chemical management substances regulated by the RoHS directives, the REACH Regulation and Japanese laws and regulations of Chemical Substances.

Classification in this catalog

Power type		—— The type of power source is indicated.	
Brush motor	Brushless motor	—— The type of motor is indicated.	
Miniature screw	Precision screw	Machine screw	—— The type of screw* is indicated.
Screw Size			—— The size range of screw is indicated.

* Miniature screw ... for 1.0 to 2.6 mm

Precision screw ... for 1.0 to 3.5 mm

Machine screw ... for 2.6 to 8.0 mm



About Torque Management


The fastening torque generated on the screw varies depending on the screw size, material and the type of workpiece. Always check and manage the torque generated on the screw with a torque wrench., etc. The fastening torque varies depending on the fastening conditions.

delvo

CONTENTS

List of Screwdrivers	3
C Series (Current Control Type)	7
S Series (Variable Speed Type)	10
A Series (Low Voltage Type [DC])	13
A Series (Transformerless Type [AC])	14
DLV02/12/16 Series	15
DLV7400A Series	16
DLV5700 Series	17
DLV5800 Series	18
DLV7300 Series	19
DLV7300-BME/BKE Series	20
DLV7500/8500 Series	21
DLV7000/8000 Series	24
DLV7100/7200/8100/8200 Series	25
DLV7104/8104/8204 Series	26
Screw Fastening Counters	27
DLR5640-WN	29
Screwdrivers designed for DLR5640-WN	30
DLR5040A/5340-WE	31
Screwdrivers designed for DLR5040A/5340-WE	32
A Series (For Automation)	33
DLV3100/3300 Series (For Automation)	35
DLT1173A/1673A/1973A	36
NK BIT	37
Vacuum Pickups and Sleeves	39
Accessories	40
Safety guide	42

Quick Reference Symbols

 Lever Start Operates when the lever is pressed.	 Push to Start Operates when the screwdriver is pressed.	 Transformerless A dedicated controller is not required. Operates by commercial power supply.	 Low Low Voltage Connect to dedicated controller. Operates at electric voltage under 42V.
 Brushless Motor Maintenance free, no brush replacement required. Realizes high durability.	 Grounded Bit Prevents electrostatic breakdown when the bit contacts the workpiece.	 ESD Protection Prevents electrostatic charging and saves the workpiece from electrostatic breakdown.	 Low Shock Softens the shock at the end of tightening and lowers the load to the workpiece.
 Clean room adaption Adapts to assembly in class 5 clean rooms	 Soft Soft Stop Gradually reduces the rotation speed to improve the screw tightening quality.	 Variable Speed Can be adjusted to a suitable tightening speed.	 Soft Soft Start Gradually increases the rotation speed to prevent damage to the screw head.

[Brushless Motor - DC Power Supply]

Page	Outer Appearance	Series	Model	Torque Range (Nm [lbf-in])	Screw Size (mm)		Mass (g [lbs])	Lever Start	Push to Start	ESD Protection	Soft Stop	Low Speed	Medium Speed	High Speed	Built-in Screw Counter	SPC Type available (for screw counter)	Controller	
					min.	max.											Model	Outer Appearance
7		C Series (Current control type)	DLV04C10L	0.05 - 0.4 [0.4 - 3.5]	1.2	3.0	370 [0.82]	●		●		●	●	●		DCC0101X-AZ		
			DLV10C10L	0.2 - 1.0 [1.8 - 8.9]	1.8	4.0		●		●		●	●	●				
10		S Series (Variable speed type)	DLV30S06L	0.4 - 3.0 [3.5 - 26.6]	2.6	5.0	710 [1.57]	●		●	●	●		●		DEA0151N-AZ or DEA0241N-AZ		
			DLV30S06P						●	●	●	●		●				
			DLV30S12L					●		●	●		●					
			DLV30S12P						●	●	●	●		●				
			DLV30S20L	2.0 - 4.5 [17.7 - 39.8]	4.5	6.0	860 [1.90]	●		●	●		●			DEA0241N-AZ		
			DLV30S20P						●	●	●			●				
			DLV45S06L					●		●	●	●		●				DEA0151N-AZ or DEA0241N-AZ
			DLV45S06P						●	●	●	●		●				
			DLV45S12L	3.8 - 7.0 [33.6 - 62.0]	5.0	8.0		●	●	●	●			●		DEA0241N-AZ		
			DLV45S12P						●	●	●	●		●				
13		A Series	DLV30A06L	0.4 - 3.0 [3.5 - 26.6]	2.6	5.0	690 [1.52]	●		●						DEA0151N-AZ or DEA0241N-AZ		
			DLV30A06P						●	●								
			DLV30A12L					●		●		●						
			DLV30A12P						●	●		●						
			DLV30A20L	2.0 - 4.5 [17.7 - 39.8]	4.5	6.0	840 [1.85]	●		●				●		DEA0241N-AZ		
			DLV30A20P						●	●				●				
			DLV45A06L					●		●		●						DEA0151N-AZ or DEA0241N-AZ
			DLV45A06P						●	●		●						
			DLV45A12L	3.8 - 7.0 [33.6 - 62.0]	5.0	8.0		●	●	●		●				DEA0241N-AZ		
			DLV45A12P						●	●		●	●					
15		DLV02/12/16	DLV02SL-CKE	0.03 - 0.2 [0.3 - 1.8]	1.0	2.2	470 [1.04]	●				●				DLC16S		
			DLV02SL-BKE					●		●			●					
			DLV12SL-CKE	0.15 - 1.2 [1.3 - 10.6]	1.4	3.0		●		●			●					
			DLV12SL-BKE					●	●				●					
			DLV16SL-CKE	0.2 - 1.6 [1.8 - 14.2]	2.2	4.0		●					●					
			DLV16SL-BKE					●		●			●					

[Brushless Motor - AC Power Supply]

Screw Size (mm)	Torque Range (Nm [lbf-in])	Model	Series	Outer Appearance	Page	SPC Type available (for screw counter)	Built-in Screw Counter	High Speed	Medium Speed	Low Speed	Soft Stop	ESD Protection	Push to Start	Lever Start
						min.	max.							
700 [1.54]	2.6	5.0	A Series	DLV30A06L	0.4 - 3.0 [3.5 - 26.6]	●	●			●				●
				DLV30A06P			●				●			●
				DLV30A12L				●						●
				DLV30A12P										●
870 [1.92]	4.5	6.0		DLV30A20L	2.0 - 4.5 [17.7 - 39.8]	●	●							●
				DLV30A20P			●							●
				DLV45A06L				●						●
				DLV45A06P			●							●
				DLV45A12L	3.8 - 7.0 [33.6 - 62.0]		●							●
				DLV45A12P										●
				DLV70A06L		●				●				●
				DLV70A06P			●			●				●

[Brush Motor - DC Power Supply]

Page	Outer Appearance	Series	Model	Torque Range (Nm [lbf·in])	Screw Size (mm)		Mass (g [lbs])	Lever Start	Push to Start	ESD Protection	Clean Room Type	High Speed	Low Shock	SPC Type available (for screw counter)	Controller		
					min.	max.									Model	Adjustable speed	Outer Appearance
16		7400A	DLV7410A	0.02 - 0.2 [0.2 - 1.8]	1.0	2.3	230 [0.51]	●		●			●	●	DLC1110	●	
			DLV7410HA							●	●						
			DLV7420A	0.15 - 0.4 [1.3 - 3.5]	1.6	2.6	●		●		●	●					
			DLV7419A	0.02 - 0.2 [0.2 - 1.8]	1.0	2.3	●		●	●		●					
			DLV7419HA				●		●	●	●						
			DLV7429A	0.15 - 0.4 [1.3 - 3.5]	1.6	2.6	●		●	●		●					
17		5700	DLV5720	0.02 - 0.2 [0.2 - 1.8]	1.0	2.3	230 [0.51]	●		●			●		DLC0350	●	
			DLV5720H							●	●			●			
			DLV5740	0.15 - 0.4 [1.3 - 3.5]	1.6	2.6	●		●			●	●	DLC0950	●		
			DLV5740H						●	●			●				
18		5800	DLV5820	0.02 - 0.2 [0.2 - 1.8]	1.0	2.3	230 [0.51]	●		●				DLC0250E	●		
			DLV5820H							●	●						
			DLV5840	0.15 - 0.4 [1.3 - 3.5]	1.6	2.6	●		●								
19		7300	DLV7313	0.03 - 0.15 [0.3 - 1.3]	Up to 2.0		350 [0.77]	●							DLC1213A	●	
			DLV7323	0.05 - 0.5 [0.4 - 4.4]	1.0	3.0		●									
			DLV7333	0.3 - 1.2 [2.7 - 10.6]	2.0	3.5		●									
			DLV7325	0.05 - 0.5 [0.4 - 4.4]	1.0	3.0	400 [0.88]	●		●							
			DLV7335	0.3 - 1.2 [2.7 - 10.6]	2.0	3.5		●		●							
20		7300-BME/ BKE	DLV7321	0.05 - 0.5 [0.4 - 4.4]	1.0	3.0	350 [0.77]	●		●	●			●	DLC1213A	●	
			DLV7331	0.3 - 1.2 [2.7 - 10.6]		3.5		●		●	●			●			
			DLV7319	0.2 - 0.4 [1.8 - 3.5]	2.0	3.0	400 [0.88]	●		●	●						
			DLV7329	0.25 - 0.55 [2.2 - 4.9]				●		●	●						
			DLV7339	0.45 - 0.95 [4.0 - 8.4]				●		●	●						
			DLV7349	0.55 - 1.2 [4.9 - 10.6]	3.0	3.5		●		●	●						
21		7500	DLV7530-MKE	0.5 - 1.7 [4.4 - 15.1]	2.6	4.0	650 [1.43]	●						DLC4511	●		
			DLV7530-BKE							●		●					
			DLV7540-MKE	1.2 - 2.7 [10.6 - 23.9]	3.5	5.0	●										
			DLV7540-BKE				●		●								
			DLV7550-MKE	2.0 - 4.5 [17.7 - 39.8]	4.5	6.0	●										
			DLV7550-BKE				●		●								
		8500	DLV8530-MKE	0.5 - 1.7 [4.4 - 15.1]	2.6	4.0	650 [1.43]		●								
			DLV8530-BKE						●	●							
			DLV8540-MKE	1.2 - 2.7 [10.6 - 23.9]	3.5	5.0		●									
			DLV8540-BKE				●	●									
			DLV8550-MKE	2.0 - 4.5 [17.7 - 39.8]	4.5	6.0	●		●								
			DLV8550-BKE				●	●									

[Brush Motor - AC Power Supply]


Page	Outer Appearance	Series	Model	Torque Range (Nm [lbf·in])	Screw Size (mm)		Mass (g [lbs])	Lever Start	Push to Start	ESD Protection	High Speed	SPC Type available (for screw counter)
					min.	max.						
24		7000	DLV7020	0.05 - 0.55 [0.4 - 4.9]	1.0	3.0	400 [0.88]	●				●
			DLV7030	0.3 - 1.1 [2.7 - 9.7]	2.0	3.5		●				●
			DLV7031	0.3 - 1.0 [2.7 - 8.9]				●		●	●	
		8000	DLV8020	0.1 - 0.55 [0.9 - 4.9]	1.0	3.0	410 [0.90]		●			●
			DLV8030	0.3 - 1.1 [2.7 - 9.7]	2.0	3.5			●			●
			DLV8031	0.3 - 1.0 [2.7 - 0.9]		3.0			●	●		●
25	              	7100/ 7200	DLV7120	0.35 - 0.70 [3.1 - 6.2]	2.6	3.0	700 [1.54]	●				●
			DLV7130	0.5 - 1.7 [4.4 - 15.1]		4.0		●				●
			DLV7140	1.2 - 3.0 [10.6 - 26.6]	3.5	5.0		●				●
			DLV7221	0.35 - 0.7 [3.1 - 6.2]	2.6	3.0		●			●	
			DLV7231	0.5 - 1.7 [4.4 - 15.1]		4.0		●		●	●	
			DLV7241	1.2 - 3.0 [10.6 - 26.6]	3.5	5.0		●				●
			DLV7251	2.0 - 4.5 [17.7 - 39.8]	4.5	6.0		890 [1.96]	●			
		8100/ 8200	DLV8120	0.35 - 0.70 [3.1 - 6.2]	2.6	3.0	690 [1.52]		●			●
			DLV8130	0.5 - 1.7 [4.4 - 15.1]		4.0			●			●
			DLV8140	1.2 - 3.0 [10.6 - 26.6]	3.5	5.0			●			●
			DLV8150	2.0 - 4.5 [17.7 - 39.8]	4.5	6.0	890 [1.96]		●			●
			DLV8221	0.35 - 0.7 [3.1 - 6.2]	2.6	3.0	690 [1.52]		●		●	
			DLV8231	0.5 - 1.7 [4.4 - 15.1]		4.0			●		●	●
			DLV8241	1.2 - 3.0 [10.6 - 26.6]	3.5	5.0			●			●
			DLV8251	2.0 - 4.5 [17.7 - 39.8]	4.5	6.0	890 [1.96]		●			●
26	         	7104/ 8104/ 8204	DLV7124	0.25 - 0.75 [2.2 - 6.6]	2.6	3.0	720 [1.59]	●		●		
			DLV7134	0.5 - 1.7 [4.4 - 15.1]		4.0		●		●		
			DLV7144	1.2 - 3.0 [10.6 - 26.6]	3.5	5.0		●		●		
			DLV8124	0.25 - 0.75 [2.2 - 6.6]	2.6	3.0	710 [1.57]		●	●		
			DLV8134	0.5 - 1.7 [4.4 - 15.1]		4.0			●	●		
			DLV8144	1.2 - 3.0 [10.6 - 26.6]	3.5	5.0			●	●		
			DLV8154	2.0 - 4.5 [17.7 - 39.8]	4.5	6.0	910 [2.01]		●	●		
			DLV8224	0.35 - 0.7 [3.1 - 6.2]	2.6	3.0	710 [1.57]		●	●	●	
			DLV8234	0.5 - 1.7 [4.4 - 15.1]		4.0			●	●	●	
			DLV8244	1.2 - 3.0 [10.6 - 26.6]	3.5	5.0			●	●		

[Brushless Motor]

Page	Outer Appearance	Series	Model	Torque Range (Nm [lbf-in])	Screw Size (mm)		Mass (g [lbs])	Low Speed	Medium Speed	High Speed	Standard	Flange	M41 Screw	Coupling				
					min.	max.								Type of couplings				
33		A Series (for automation)	DLV30A06A-N	0.4 - 3.0 [3.5 - 26.6]	2.6	5.0	700 [1.54]	●			●				 Standard coupling			
			DLV30A06A-F				760 [1.68]	●			●							
			DLV30A06A-M				740 [1.63]	●				●						
			DLV30A12A-N				700 [1.54]		●		●							
			DLV30A12A-F				760 [1.68]		●			●						
			DLV30A12A-M				740 [1.63]		●			●						
			DLV30A20A-N				700 [1.54]			●	●							
			DLV30A20A-F				760 [1.68]			●		●						
			DLV30A20A-M				740 [1.63]			●			●					
			DLV45A06A-N	2.0 - 4.5 [17.7 - 39.8]	4.5	6.0	780 [1.72]	●			●			 Flange coupling				
			DLV45A06A-F				840 [1.85]	●				●						
			DLV45A06A-M				820 [1.81]	●					●					
			DLV45A12A-N				780 [1.72]		●		●							
			DLV45A12A-F				840 [1.85]		●			●						
			DLV45A12A-M				820 [1.81]		●				●					
			DLV70A06A-N	3.8 - 7.0 [33.6 - 62.0]	5.0	8.0	780 [1.72]	●			●			 M41 screw coupling				
			DLV70A06A-F				840 [1.85]	●				●						
			DLV70A06A-M				820 [1.81]	●					●					

[Brush Motor]

Page	Outer Appearance	Series	Model	Torque Range (Nm [lbf-in])	Screw Size (mm)		Mass (g [lbs])	Controller Model
					min.	max.		
35		3100 (for automation)	DLV3121	0.25 - 0.7 [2.2 - 6.2]	2.3	2.6	900 [1.98]	Transformerless (controller not required)
			DLV3131	0.5 - 1.5 [4.4 - 13.3]	2.6	3.5		
			DLV3141	1.2 - 3.0 [10.6 - 26.6]	3.5	5.0		
			DLV3151	2.0 - 4.5 [17.7 - 39.8]	4.5	6.0		
		3300 (for automation)	DLV3321	0.05 - 0.5 [0.4 - 4.4]	1.0	3.0	400 [0.88]	DLC3310
			DLV3331	0.3 - 1.2 [2.7 - 10.6]	2.0	3.5		



delvo Brushless Type

C Series (Current control Type) Model **DLV04C/10C**

NEW



Features

- Easy fastening setting by controller
- Current Controlled Torque System suitable for screw fastening work
- Low-voltage brushless motor
- ESD (electrostatic discharge) protection structure
- For both hand-held / automatic machines
- Controller has built in counting function. Prevents human errors

Four screwdrivers can be consolidated into one

- **Controller can be set to any torque and speed within range.**

* The range varies depending on SOFT fastening or HARD fastening.

0.25 Nm 450 min ⁻¹		1st unit
0.15 Nm 600 min ⁻¹		2nd unit
0.35 Nm 1000 min ⁻¹		3rd unit
0.30 Nm 450 min ⁻¹		4th unit



Torque: 0.05 - 0.4 Nm (DLV04C)
[0.44 - 3.54 lbf·in]
0.2 - 1.0 Nm (DLV10C)
[1.77 - 8.85 lbf·in]
Speed: 100 - 1000 min⁻¹

Torque range **0.05 - 1.0 Nm**

When the same bit is used.

All in one!

- **Easily adapts for use in automatic machines**

The sequencing of the screwdrivers can be controlled by a PLC.



For installation on automatic assembly machines, attach optional flange coupling (DLW9015) or vacuum pickup (DLP6650).



- **Built-in Screw Fastening Counter Function**

Controller has built in counting function. Prevents human errors.



Specifications

Electric Screwdriver	Model	Bit	CE/UL	DLV04C10L-AY	K	DLV10C10L-AY	K
	Power Source			DCC0101X-AZP or DCC0101X-AZN			
	Torque Adjustment			Adjustment from 1 to 100% in 1% increments			
	Torque	SOFT fastening setting (1000 min ⁻¹ setting)		0.05 - 0.4 [0.4 - 3.5]		0.2 - 1.0 [1.8 - 8.9]	
		SOFT fastening setting (600 min ⁻¹ setting)		0.05 - 0.35 [0.4 - 3.1]		0.2 - 0.45 [1.8 - 4.0]	
	(Nm [lbf·in])	HARD fastening setting		0.05 - 0.4 [0.4 - 3.5]		0.2 - 1.0 [1.8 - 8.9]	
	Free Speed (min ⁻¹)	SOFT fastening setting		600 - 1000			
		HARD fastening setting		100 - 1000			
	Screw Size (mm)	Machine screw		1.2 - 3.0		1.8 - 4.0	
		Tapping screw		1.1 - 2.5		1.6 - 3.5	
Bit Type	NK35 (OD6.35 mm [1/4"] Hex. Shank)						
Input Voltage	24 V DC						
Mass	370 g [0.82 lbs]						
Rated Operation	ON: 0.5 seconds / OFF: 3.5 seconds						
Standard Accessories	• Bit NK35(No.0 x 4 x 75): 1 pc. • Bit NK35(No.1 x 4 x 75): 1 pc. • Bit NK35(No.1 x 4 x 75): 1 pc. • Bit NK35(No.2 x 4 x 75): 1 pc. • Bit NK35(No.2 x 4 x 75): 1 pc. • Connection Cord(DLW9075): 1 pc. • Connection Cord(DLW9075): 1 pc. • Suspension Bail: 1 pc. • Suspension Bail: 1 pc.						

Model	DCC0101X-AZ : P*
Input Voltage	100 - 240 V AC, 50/60Hz
Operation Channel	Torque and speed setting in 4-channel memory
Function	Can switch to any operation channel
Count Function	Tracks screws fastened
	Workpiece detector can be incorporated
External Start up	Start up control can be enabled by external input signal
Control Function	
Input Signal Method	Photocoupler input
	(24 V DC drive (5 mA/1 input), respond to PNP output)
Output Signal	Photocoupler output
Method	(30 V DC or less, 30 mA/1 output or less, PNP output method)
Service Power Source	24 V DC (Maximum capacity 200 mA)
Power consumption	When on standby: 20 W
	During electric screwdriver rotation (rated): 30 W
Mass	1100 g [2.4 lbs]
Power cord (Optional)*	DLW9220 / DLW9240 / DLW9250

*DCC0101X-AZN with NPN output also available

*The power cord is sold separately. Ask us for the required power cord when ordering. (see page 9 "Optional Accessories")

Please contact us for 4 mm bit type ("M" Bit) of CE/UL models.

Comparison of Adjustment Method with Conventional Model

	Conventional	C Series
Torque adjustment	 Torque is adjusted by turning the adjustment ring at the end of the screwdriver.	 Can be set with the external controller. No need to adjust the screwdriver body.
Speed setting	 The speed of transformerless type screwdrivers is fixed for each series.	 Can be set with the external controller. Adjustable between 100 to 1000 min⁻¹.

SOFT / HARD Fastening Settings


Two types of fastening mode available subject to the workpiece.

Coordinate the actual workpieces, screws and operating conditions and determine the fastening mode.

SOFT fastening setting Suitable for workpieces with high fastening load such as tapping screws or fastening soft objects such as rubber.

HARD fastening setting Suitable for workpieces with small fastening load such as threaded holes or rigid bodies such as metal.

Output Torque and Rotation Speed

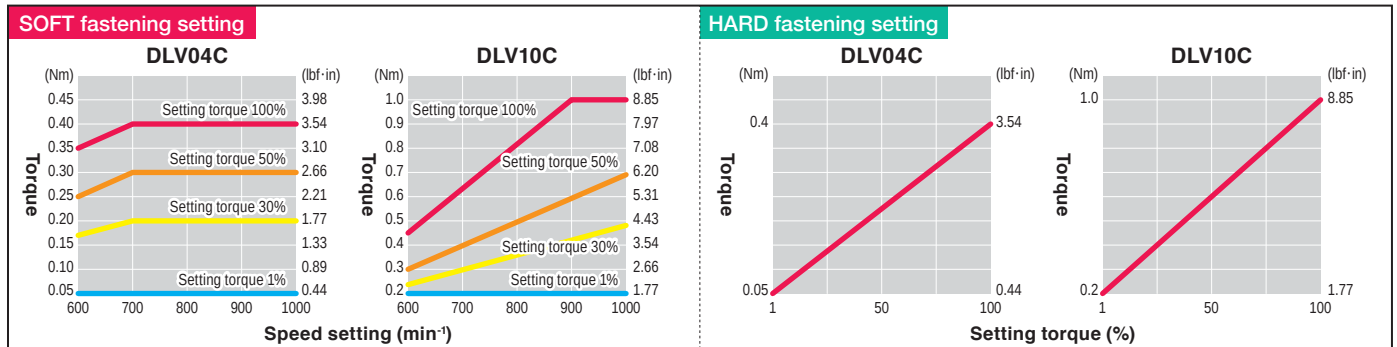

*The graph is for guidance only. The output torque range is not guaranteed.

External Signals

You can input or output external signals via a signal terminal block.

Terminal No.	Function	Details	I/O	
1 (+)	+24 V DC	Built-in service power source (Capacity: Maximum 200 mA) • Use in power source for input/output signal common wire, or for the workpiece detection sensor, etc.	Service power source	
2 (-)	0 V DC			
3	Channel A	In the 2-bit input signal, specify the operation channel (CH1 to CH4) • Valid only when "operation channel switching method" (No.1 CH-CHG) is set to "INPUT"		
4	Channel B			
5	Forward rotation startup	Startup with external input signal		
6	Reverse rotation startup			
7	WORK	Input the workpiece signal (workpiece detection sensor output) • With "count function" (No.11 COUNT-FNC) and "workpiece signal" (No.12 WORK-SNSR) set to ON, the workpiece signal input is valid	Input	
8	WORK RESET	Reset operation (same as controller [WORK RESET] button)		
9	Keylock	Lock the controller button operation • Disable the controller button operation, and prevent setting changes by the operator		
10	Input signal negative common wire	Connect 0 V DC* • Service power source (terminal No.2) or external 0 V DC power source can be connected		
11	Forward rotation signal	Set output signal during forward rotation to ON	Output	
12	Reverse rotation signal	Set output signal during reverse rotation to ON		
13	Count-up (C-UP)	Performance of normal screw tightening (torque-up) sets output signal to 0.3 seconds ON		
14	Screw fastening NG (F-NG)	If screw fastening NG, sets output signal to 0.3 seconds ON		
15	Operation channel 1 (CH1)	Set the channel output signal to ON during operation or settings		
16	Operation channel 2 (CH2)			
17	Operation channel 3 (CH3)			
18	Operation channel 4 (CH4)			
19	Operation OK	If the set count screw tightening is judged to be completed and operation OK, the output signal is set to ON		
20	Operation NG	When the WORK input signal is OFF during an operation, and the operation is judged to be NG, the output signal is ON		
21	Space	Connection impossible		
22	Output signal positive common wire	Connect +24 V DC* • Service power source (terminal No.1) or external +24 V DC can be connected		

*When PNP output

Optional Accessories

Grounded 3-Prong Power Cord

DLW9220



North America

DLW9240



Europe

DLW9250



UK

Screw vacuum pump

DLP2530 (100 V), DLP2570 (230 V)

Connect the tube to the vacuum pickup port. The vacuum will pick up the screw.



Torque checker
DLT1173A



Screw joint (with white rubber)
DLW4540



*For DLV04C10L-AY SOFT fastening torque measurement

Screw joint (with black rubber)
DLW4550



*For DLV10C10L-AY SOFT fastening torque measurement

Screw joint (with metal washer)
DLW4560



*For HARD fastening torque measurement of both DLV04/10C10L-AY

For "K" Bit

Vacuum pickup
DLP6640



Vacuum pickup (for automatic machine)
DLP6650



Connection Cord
DLW9075



Standard accessory of screwdrivers


Flanged coupling (for automatic machine)
DLW9015




* Please see page 39 for details.

External Dimensions


•DLV04C/10C ("K" Bit Type)

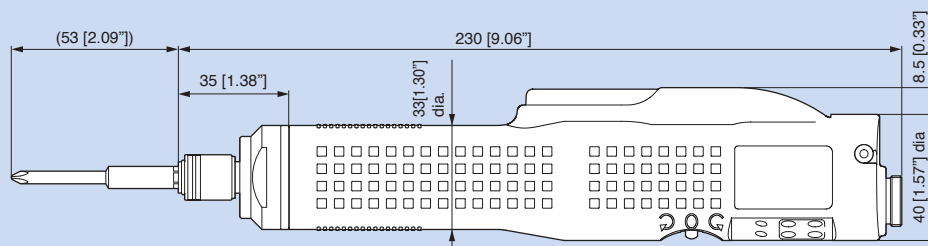

•DCC0101X-AZ

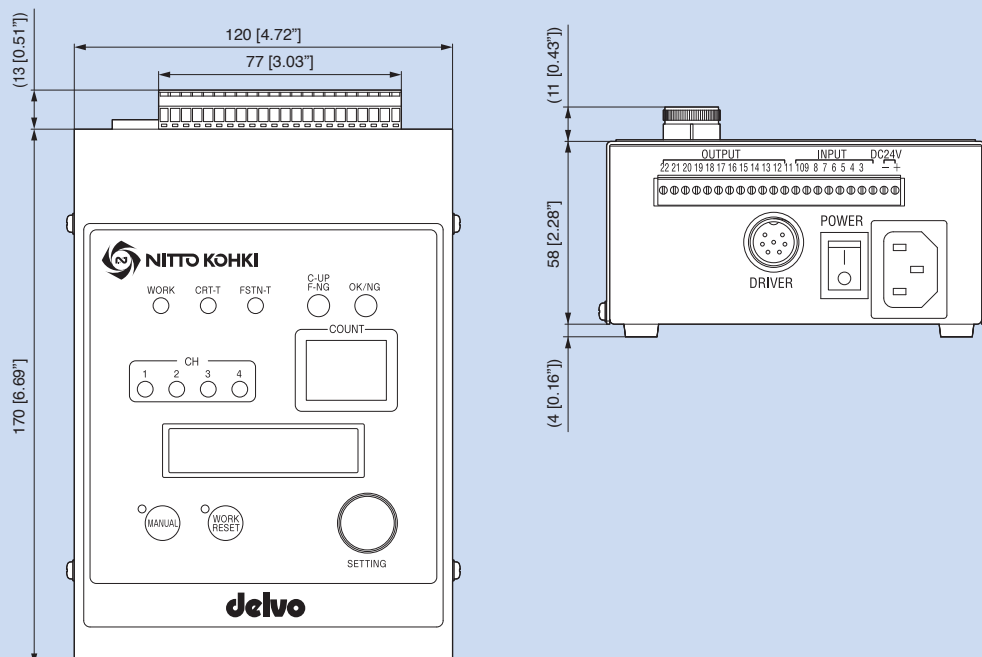

unit: mm [inch]



delvo Brushless Type

S Series (Variable speed Type) Model DLV30S/45S/70S

NEW



Features

- Built-in brushless motor
- Automatic speed control function
- Built-in screw counting function
- Setting with the Remote Controller
- ESD (electrostatic discharge) protection structure

This screwdriver can deal with various fastening conditions.

Torque range **0.4 - 7.0 Nm**
[3.5 - 62.0 lbf-in]

Built-in Automatic Speed Control Function

Low speed starting reduces the problems at start.

<Step 1>

High speed feeding at middle improves efficiency and quality of screw fastening work.

<Step 2>

Low speed fastening at finish reduces the problems at finish.

<Step 3>


Built-in the Functions of Screw Fastening Counter

- screw count setting
- fastening time setting, and fastening time measurement




Main LED mounted on the screwdriver

LEDs and Setting Buttons on the Screwdriver




Part Names of the Remote Controller



Specifications

Specifications		Low Speed	Standard	High Speed	Low Speed	Standard	Low Speed
Model	Bit	DLV30S06L-AY: K	DLV30S12L-AY: K	DLV30S20L-AY: K	DLV45S06L-AY: K	DLV45S12L-AY: K	DLV70S06L-AY: K
	Lever Start Push to Start	DLV30S06P-AY: K	DLV30S12P-AY: K	DLV30S20P-AY: K	DLV45S06P-AY: K	DLV45S12P-AY: K	DLV70S06P-AY: K
Power Source		DEA0151N-AZ or DEA0241N-AZ		DEA0241N-AZ	DEA0151N-AZ or DEA0241N-AZ	DEA0241N-AZ	
Torque Adjustment		Stepless					
Torque (Nm [lbf-in])	Low Torque Spring*1	0.4 - 1.6 [3.5 - 14.2]			2.0 - 4.5 [17.7 - 39.8]		3.8 - 7.0 [33.6 - 62.0]
	High Torque Spring*2	1.2 - 3.0 [10.6 - 26.6]					
Free Speed (min ⁻¹)		For the details, see separate setting range of speed and torque.					
Speed Level		Lv1 - Lv9 (Lv1: Min. Speed Lv9: Max. Speed decreases in a step-by-step manner)					
Power Consumption (W)		44					
Screw Size (mm)	Machine Screw	2.6 - 5.0			4.5 - 6.0		5.0 - 8.0
	Tapping Screw	2.5 - 4.0			4.0 - 5.0		4.5 - 6.0
Mass (g [lbs])		710 [1.57]			860 [1.90] (with pistol grip)		
Standard Accessories ³		• Bit NK35(No.2 × 7 × 75): 1 pc. • Low Torque Spring: 1 pc. • Suspension Bail: 1 pc. • Connection Cord (DLW9073): 1 pc.			• Bit NK35(No.2 × 7 × 75): 1 pc. • Connection Cord (DLW9073): 1 pc. • Suspension Bail: 1 pc. • Pistol Grip (DLW2300ESD): 1 pc.		



Please contact us for 5 mm bit type

*1: Standard Accessory

*2: Installed

*3: The power cord is sold separately. Ask us for the required power cord when ordering.



Setting Range of Speed and Torque (for reference only)

		DLV30S06	DLV45S06	DLV70S06			DLV30S12	DLV45S12			DLV30S20
Speed Level	Speed (min ⁻¹)	Torque (Nm [lbf-in])			Speed Level	Speed (min ⁻¹)	Torque (Nm [lbf-in])		Speed Level	Speed (min ⁻¹)	Torque (Nm [lbf-in])
Lv1	160	0.4 - 1.3 [3.5 - 11.5]	-	-	Lv1	300	0.4 - 0.6 [3.5 - 5.3]	-	Lv1	500	0.4 [3.5]
Lv2	220	0.4 - 2.0 [3.5 - 17.7]	2.0 - 2.4 [17.7 - 21.2]	-	Lv2	420	0.4 - 1.2 [3.5 - 10.6]	-	Lv2	690	0.4 - 0.8 [3.5 - 7.0]
Lv3	280	0.4 - 2.7 [3.5 - 23.9]	2.0 - 3.5 [17.7 - 30.9]	3.8 [33.6]	Lv3	530	0.4 - 1.8 [3.5 - 15.9]	2.0 [17.7]	Lv3	880	0.4 - 1.2 [3.5 - 10.6]
Lv4	340	0.4 - 3.0 [3.5 - 26.6]	2.0 - 4.5 [17.7 - 39.8]	3.8 - 4.6 [33.6 - 40.7]	Lv4	640	0.4 - 2.4 [3.5 - 21.2]	2.0 - 2.6 [17.7 - 23.0]	Lv4	1,060	0.4 - 1.6 [3.5 - 14.1]
Lv5	410	0.4 - 3.0 [3.5 - 26.6]	2.0 - 4.5 [17.7 - 39.8]	3.8 - 5.4 [33.6 - 47.8]	Lv5	750	0.4 - 3.0 [3.5 - 26.6]	2.0 - 3.2 [17.7 - 28.3]	Lv5	1,250	0.4 - 2.0 [3.5 - 17.7]
Lv6	470	0.4 - 3.0 [3.5 - 26.6]	2.0 - 4.5 [17.7 - 39.8]	3.8 - 6.2 [33.6 - 54.9]	Lv6	860	0.4 - 3.0 [3.5 - 26.6]	2.0 - 3.8 [17.7 - 33.6]	Lv6	1,440	0.4 - 2.4 [3.5 - 21.2]
Lv7	530	0.4 - 3.0 [3.5 - 26.6]	2.0 - 4.5 [17.7 - 39.8]	3.8 - 7.0 [33.6 - 62.0]	Lv7	980	0.4 - 3.0 [3.5 - 26.6]	2.0 - 4.4 [17.7 - 38.9]	Lv7	1,630	0.4 - 2.8 [3.5 - 24.7]
Lv8	590	0.4 - 3.0 [3.5 - 26.6]	2.0 - 4.5 [17.7 - 39.8]	3.8 - 7.0 [33.6 - 62.0]	Lv8	1,090	0.4 - 3.0 [3.5 - 26.6]	2.0 - 4.5 [17.7 - 39.8]	Lv8	1,810	0.4 - 3.0 [3.5 - 26.6]
Lv9	650	0.4 - 3.0 [3.5 - 26.6]	2.0 - 4.5 [17.7 - 39.8]	3.8 - 7.0 [33.6 - 62.0]	Lv9	1,200	0.4 - 3.0 [3.5 - 26.6]	2.0 - 4.5 [17.7 - 39.8]	Lv9	2,000	0.4 - 3.0 [3.5 - 26.6]

*Speed and torque are for reference only. The actual values depend on the materials to be fastened and size of screws. The values are not guaranteed.

Setting Range for Standard Models

The low speed level is effective in hard-to-fasten applications such as tapped holes in sheet metal, stainless steel, and plastic. The high speed level is effective in shortening the cycle time in an assembly line.

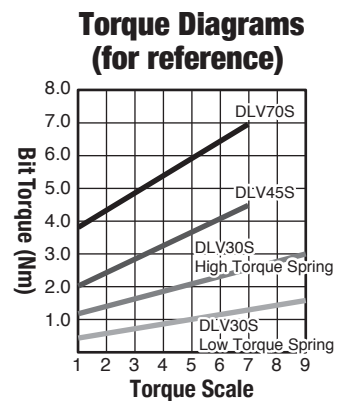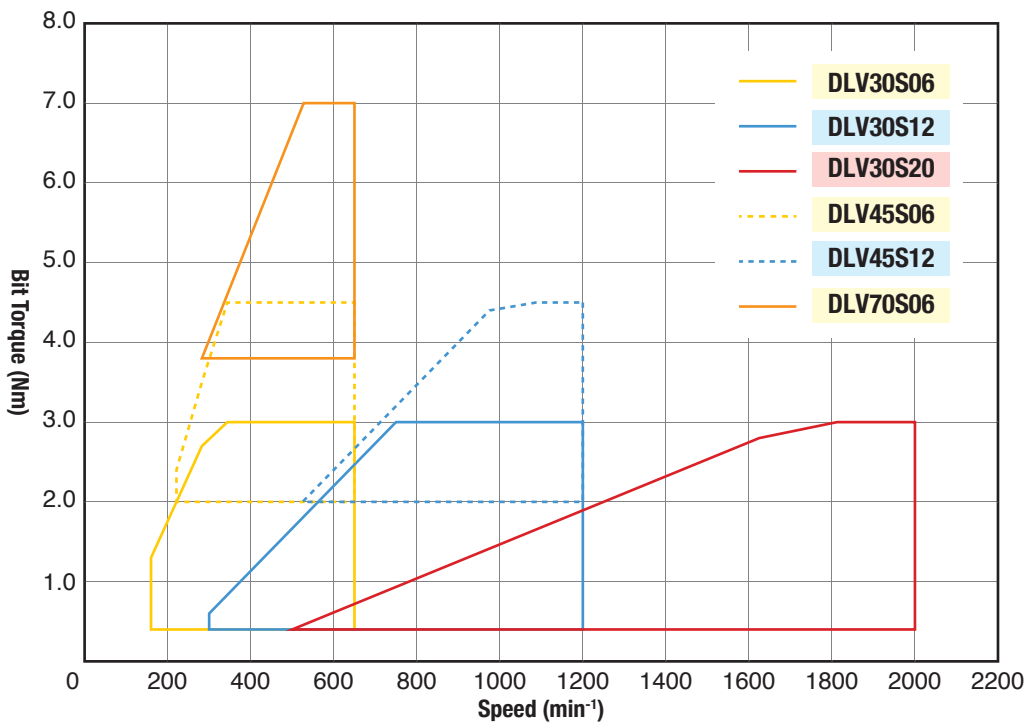

*Graphs are for reference only. The actual values depend on usage conditions.


Equipped with the External Signal Connector

The screwdriver can accept an external signal or output a signal externally through the external signal connector.

Pin No.	Lead wire color	Signal	Input / output
1	Red	+24 V DC power (supplied from outside)	
2	White	Workpiece Signal	Input
3	Green	Reset signal	Input
4	Yellow	LINK-IN	Input
5	Brown	Forced stop signal	Input
6	Blue	OK Signal	Output
7	Gray	NG Signal	Output
8	Orange	LINK-OUT	Output
9	Peach	Channel switching signal	Output
10	Purple	Torque-up (count) signal	Output
11	Yellow Green	Channel A	Input
12	Black	Channel B	Input
		Channel C	Input
		0 V DC	Input

Lead wire colors are the ones used in the optional signal cable ass'y DLW9090.


*Either Pin No.4 or 7 must be selected, but not both.


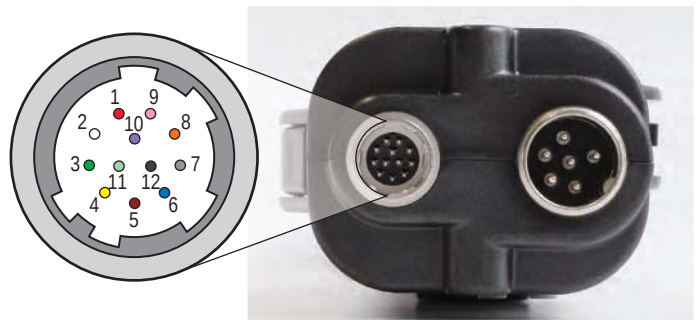


Optional Accessories

Power Supply DEA0151N-AZ DEA0241N-AZ 		Grounded 3-Prong Power Cord DLW9220 DLW9240 DLW9250  North America Europe UK			Remote Controller RC1000 
• Power cord is not included					
Signal Cable Ass'y DLW9090 	Connection Cord DLW9073 	Relay Cord (To connect DLW9073 and DLW9073) DLW9074 			
Standard accessory of screwdrivers					

External Dimensions

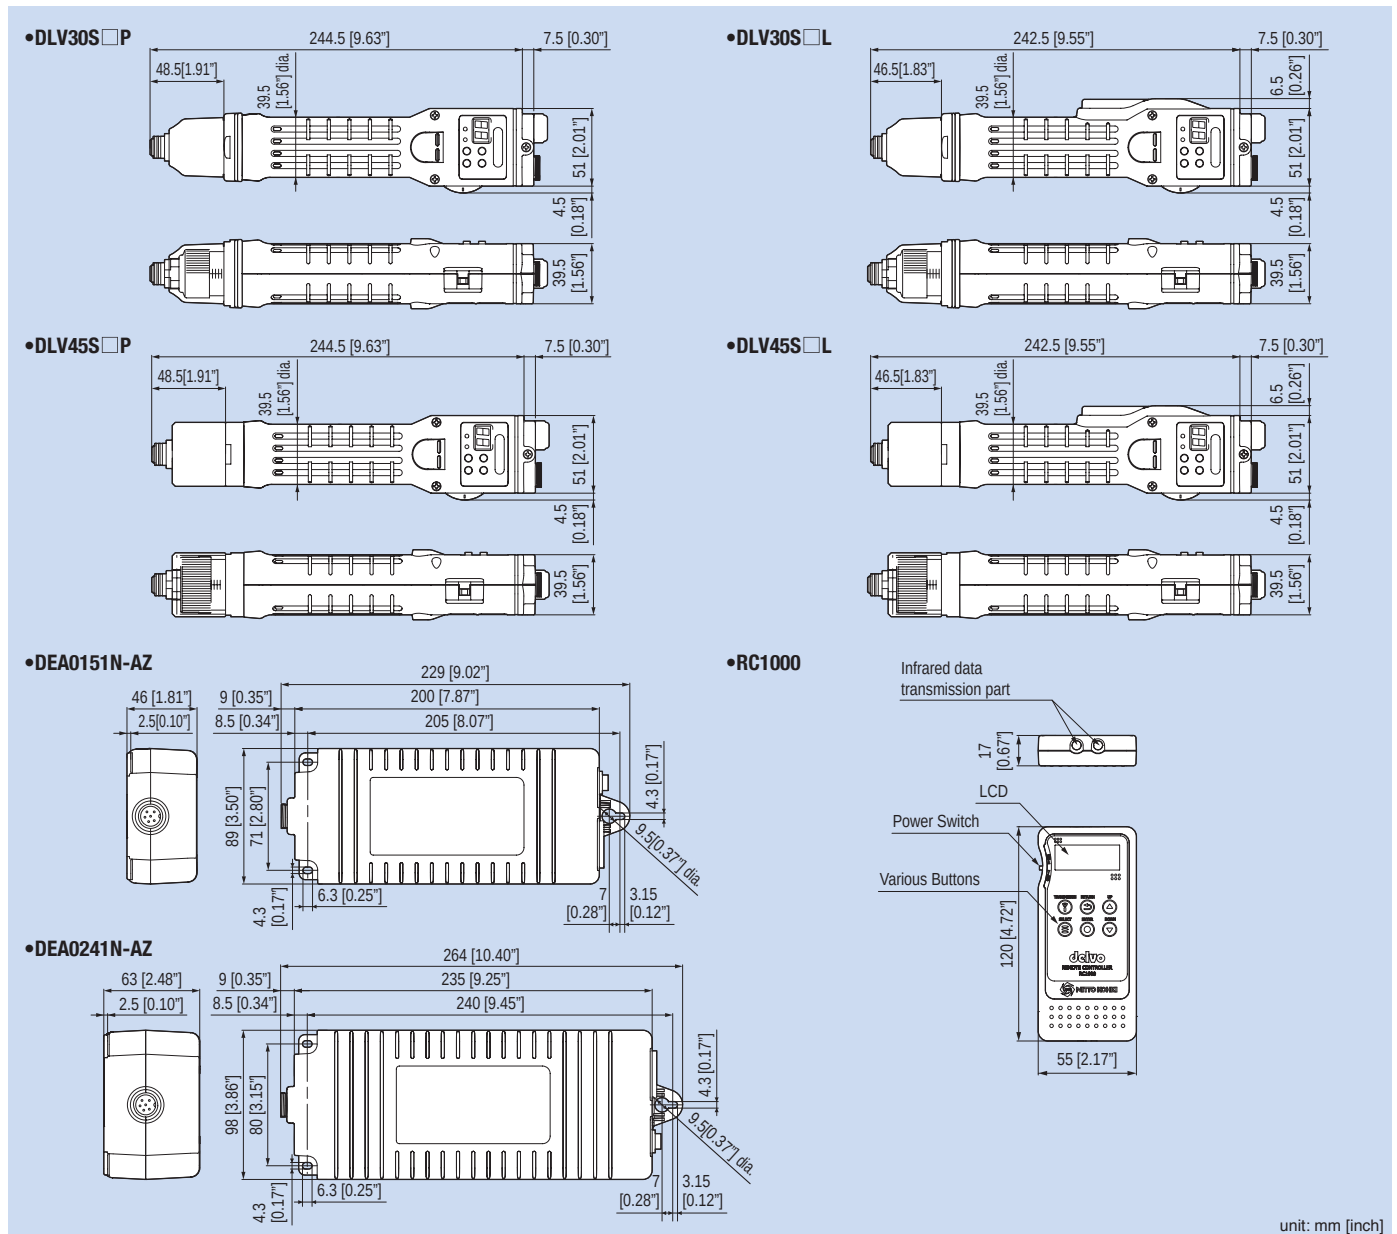



delvo Brushless Type

A Series (Low Voltage Type) Model DLV30A/45A/70A CE




Features

Eco-friendly electric screwdrivers with built-in brushless motors in a low voltage (DC) profile

- Torque range from 0.4 to 7.0 Nm
- Speed range from 650 to 2000 min⁻¹
- Both the Lever Start and Push to Start type models are available
- Equipped with a torque adjustment ring cover
- Design conforms to the RoHS Directive and thus appeals to the environmentally conscious user
- Easily detachable Pistol Grip DLW2300ESD (TD01965) comes with the unit as a standard accessory (DLV45A/70A)
- ESD (electrostatic discharge) protection structure

Specifications

Specifications			Low Speed		Standard		High Speed		Low Speed		Standard		Low Speed		
Electric Screwdriver	Model	Bit	Lever Start	DLV30A06L-AY : K	DLV30A12L-AY : K	DLV30A20L-AY : K	DLV45A06L-AY : K	DLV45A12L-AY : K	DLV70A06L-AY : K						
			Push to Start	DLV30A06P-AY : K	DLV30A12P-AY : K	DLV30A20P-AY : K	DLV45A06P-AY : K	DLV45A12P-AY : K	DLV70A06P-AY : K						
	Power Source			DEA0151N-AZ or DEA0241N-AZ			DEA0241N-AZ	DEA0151N-AZ or DEA0241N-AZ	DEA0241N-AZ						
	Torque Adjustment			Stepless											
	Torque	Low Torque Spring*1		0.4 - 1.6 [3.5 - 14.2]					2.0 - 4.5 [17.7 - 39.8]					3.8 - 7.0 [33.6 - 62.0]	
	(Nm [lbf-in])	High Torque Spring*2		1.2 - 3.0 [10.6 - 26.6]											
	Free Speed (min ⁻¹)			650	1200	2000	650	1200	650						
	Power Consumption (W)			44											
	Screw Size	Machine Screw		2.6 - 5.0					4.5 - 6.0					5.0 - 8.0	
	(mm)	Tapping Screw		2.5 - 4.0					4.0 - 5.0					4.5 - 6.0	
Mass (g [lbs])			690 [1.52]					840 [1.85] (with Pistol Grip)							
Standard Accessories			• Bit NK35(No.2 × 7 × 75): 1 pc. • Low Torque Spring: 1 pc. • Connection Cord (DLW9073): 1 pc. • Suspension Bail: 1 pc.					• Bit NK35(No.2 × 7 × 75): 1 pc. • Connection Cord (DLW9073): 1 pc. • Suspension Bail: 1 pc. • Pistol Grip (DLW2300ESD): 1 pc.							
Power Supply	Model	DEA0151N-AZ		DEA0241N-AZ		Bit Type			*1: Standard Accessory *2: Installed Torque Diagrams (for reference) 8.0 						
	Input	100 - 240 V AC, 50/60 Hz													
	Output	40 V DC													
	Maximum Rated Power (W)	150	240												
	Mass (kg)	0.56	0.9												


*The power cord is sold separately.
Ask us for the required power cord when ordering.

Please contact us for 5 mm bit type.


Optional Accessories



Torque Diagrams (for reference)



External Dimensions

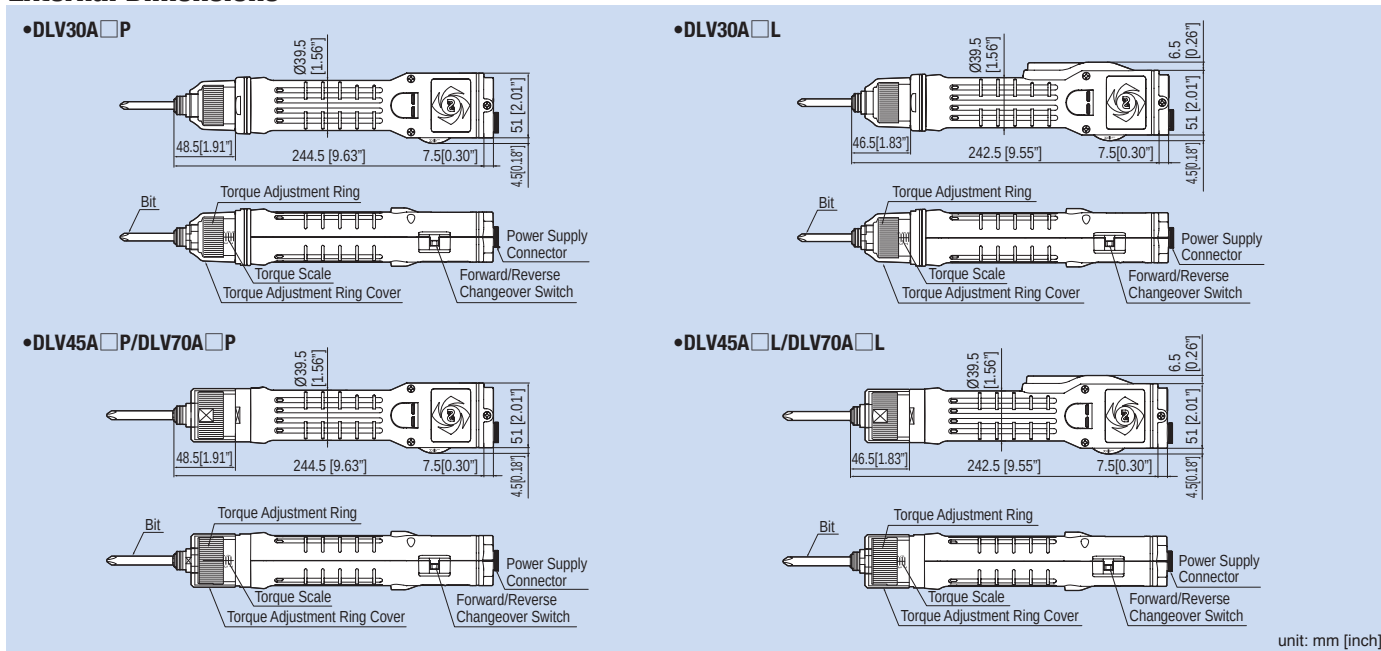

(See page 12 for external dimensions of power supply DEA0151N-AZ and DEA0241N-AZ)

Four blue and black industrial riveters are shown side-by-side. From left to right, they are labeled: DLV30A06P, DLV30A12L, DLV30A20P, and DLV45A12L. The first three are similar in design, with a blue body and a black handle. The fourth, DLV45A12L, has a more complex design with a black handle and a blue body.


- Torque range from 0.4 to 7.0 Nm
- Speed range from 650 to 2000 min⁻¹
- Both the Lever Start and Push to Start type models are available
- Equipped with a torque adjustment ring cover
- Design conforms to the RoHS Directive and thus appeals to the environmentally conscious user
- Easily detachable Pistol Grip DLW2300 (TD00335) comes with the unit as a standard accessory (DLV45A/70A)

Specifications			Low Speed	Standard	High Speed	Low Speed	Standard	Low Speed	
Electric Screwdriver	Model	Bit	Lever Start	DLV30A06L-AB : K	DLV30A12L-AB : K	DLV30A20L-AB : K	DLV45A06L-AB : K	DLV45A12L-AB : K	DLV70A06L-AB : K
			Push to Start	DLV30A06P-AB : K	DLV30A12P-AB : K	DLV30A20P-AB : K	DLV45A06P-AB : K	DLV45A12P-AB : K	DLV70A06P-AB : K
	Input Voltage		230 V AC, 50/60 Hz						
	Torque Adjustment		Stepless						
	Torque	Low Torque Spring*1	0.4 - 1.6 [3.5 - 14.2]				2.0 - 4.5 [17.7 - 39.8]		3.8 - 7.0 [33.6 - 62.0]
	(Nm [lbf·in])	High Torque Spring*2	1.2 - 3.0 [10.6 - 26.6]						
	Free Speed	(min ⁻¹)	650	1200	2000	650	1200	650	
Power Consumption		(W)	Approx. 45						
Screw Size	Machine Screw	2.6 - 5.0				4.5 - 6.0		5.0 - 8.0	
(mm)	Tapping Screw	2.5 - 4.0				4.0 - 5.0		4.5 - 6.0	
Mass	(g [lbs])	700 [1.54]				870 [1.92] (with Pistol Grip)			
Standard Accessories			• Bit NK35(No.2 × 7 × 75): 1 pc. • Suspension Bail: 1 pc. • Low Torque Spring: 1 pc. • Bit NK35(No.2 × 7 × 75): 1 pc. • Suspension Bail: 1 pc. • Pistol Grip (DLW2300)						
Bit Type			Europe		*1: Standard Accessory *2: Installed				
	unit: mm								

Optional Accessories


DLW5202

DLW5201 (Non-ESD)




External Dimensions


- DLV30A□P

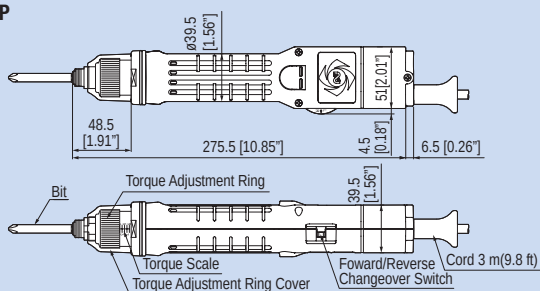


•DLV45A□P/70A06P

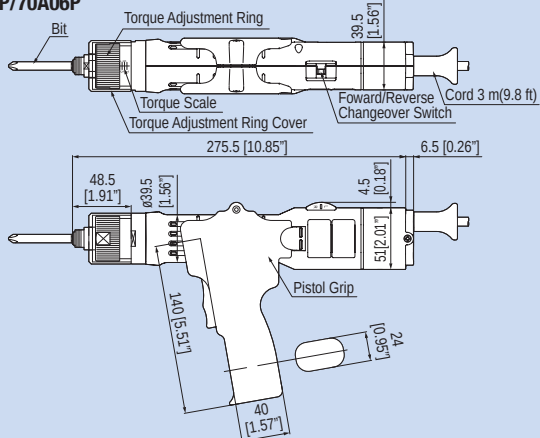


- DLV30A□L

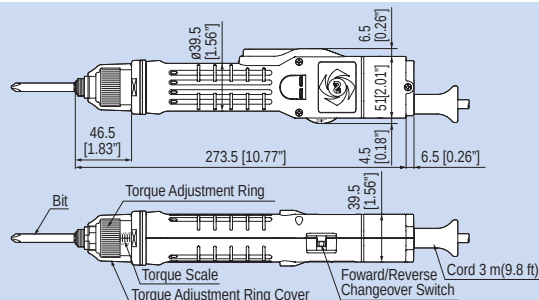

•DLV45A□L/70A06L

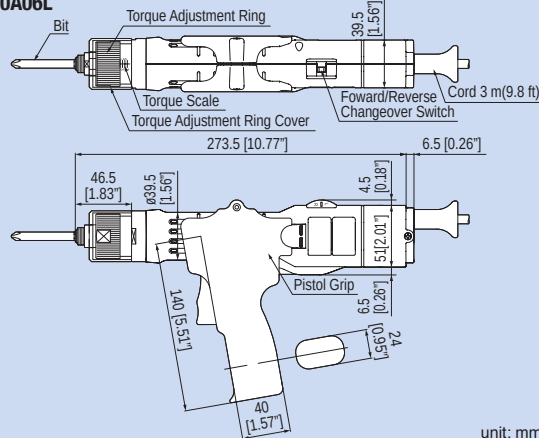

unit: mm [inch]



delvo Brushless Type

DLV02/12/16 Series CE

DLV02/12/16SL
-CKE



DLV02/12/16SL
-BKE



DLC16S




Features

Brushless motors are incorporated for maximum tool life


- Ergonomic grip offers greater operator comfort and increased maneuverability
- Grounded bit system standard
- Clear plastic torque adjustment cover provided as standard accessory (DLV02/12/16SL-CKE)
- ESD (electrostatic discharge) protection structure (DLV02/12/16SL-BKE)
- Compliant with CE standards
- Controllers feature an overload detection function. When an overload is detected, the controller stops the screwdriver. Operation can be resumed after the screwdriver is unloaded, and the lever released (DLC16S)
- Universal input voltage from 100 to 240 V AC for easy installation (DLC16S)
- Variable speed adjustment enables you to select optimum screw tightening speed (DLC16S)

Specifications

Model	Standard Type	DLV02SL-CKE	DLV12SL-CKE	DLV16SL-CKE
	ESD Protection Type	DLV02SL-BKE	DLV12SL-BKE	DLV16SL-BKE
Starting Method		Lever Start		
Input Voltage		20 - 30 V DC		
Torque Adjustment		Stepless		
Torque (Nm [lbf-in])		0.03 - 0.2 [0.3 - 1.8]	0.15 - 1.2 [1.3 - 10.6]	0.2 - 1.6 [1.8 - 14.2]
Free Speed (min ⁻¹)		700 - 1000		
Power Consumption (W)		48		
Screw Size (mm)	Machine Screw	1.0 - 2.2	1.4 - 3.0	2.2 - 4.0
	Tapping Screw	1.0 - 2.0	1.4 - 2.6	2.0 - 3.0
Mass (g [lbs])		470 [1.04]		




Model	DLC16S-WGB
Input Voltage	100 - 240 V AC, 50/60 Hz
Output Voltage	20 - 30 V DC
Function	Speed Control
Mass (g [lbs])	380 [0.84]



Standard Accessories


Model	DLV02	DLV12	DLV16
Bit NK36	No.0 × 3.8 × 50	1	-
	No.1 × 3.8 × 50	-	1
	No.2 × 4.5 × 50	1	1
Connection Cord	1		
Suspension Bail	1		

Torque Diagrams (for reference)

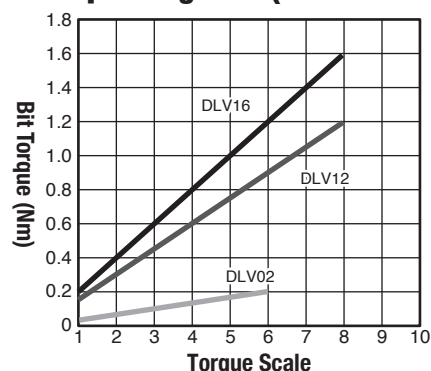


External Dimensions


•DLV02/12/16SL-CKE

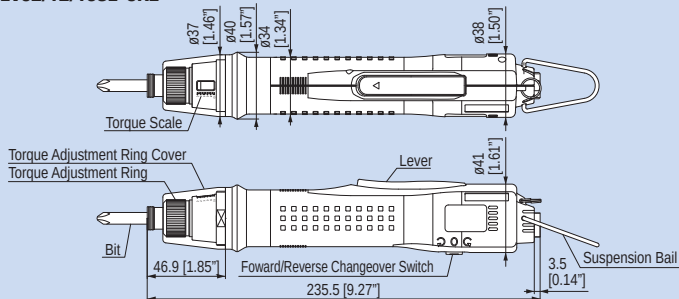


•DLV02/12/16SL-BKE

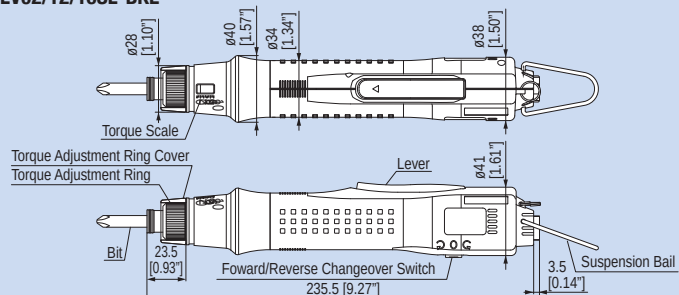

•DLC16S-WGB

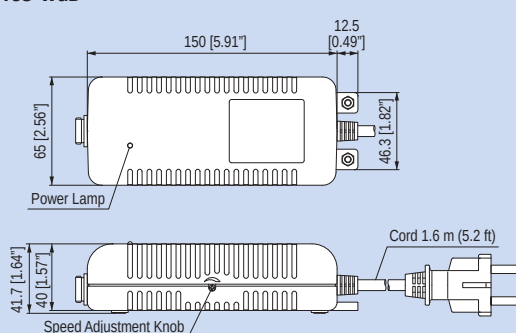

unit: mm [inch]



DLV7400A Series




Features

The light and compact body reduces operator fatigue


- Reduces shock applied to workpieces when fastening screws
- ESD (electrostatic discharge) protection structure
- Lightweight (Standard type 230 g, Clean room type 275 g)
- The Clean Room Type complies with Class 3 Clean Room Rating
- The controller can adjust speed (Screw-fastening speed can be set to suit specific fastening conditions)
- The controller provides a soft start function
- The initial speed at screwdriver startup can therefore be slowed down, effectively preventing screw heads from being scratched
- The built-in coreless motor achieves reduced inertia
- Torque accuracy is within a top-ranked worldwide level (Based on measurements at our laboratory)
- Compliant with CE standards
- Use of the Screw Fastening Counter prevents human fastening errors and enhances accurate fastening control (No CE marking or CCC applied)
- Screw Fastening Counter Model DLR5640-WN works in conjunction with any dedicated SPC-type electric screwdrivers

Specifications

Model	Standard Type	DLV7410A-BME	DLV7410HA-BME	DLV7420A-BME
	Clean Room Type	DLV7419A-BME	DLV7419HA-BME	DLV7429A-BME
Starting Method		Lever Start		
Input Voltage		40 V DC		
Torque Adjustment		Stepless		
Torque (Nm [lbf-in])		0.02 - 0.2 [0.2 - 1.8]		0.15 - 0.4 [1.3 - 3.5]
Free Speed (min ⁻¹)		500 - 750	700 - 1000	450 - 600
Power Consumption (W)		Approx. 10		
Screw Size (mm)	Machine Screw	1.0 - 2.3		1.6 - 2.6
	Tapping Screw	1.0 - 2.0		1.4 - 2.3
Mass (g [lbs])		Standard Type 230 [0.51] / Clean Room Type 275 [0.61]		



Model	DLC1110-EN	DLC1110-FE	DLC1110-GE	DLC1110-GG	DLC1110-HE	DLC1213A-GGB*1	DLC1213A-HEB*1
	Standard	Standard	Standard	With CE Mark	With CE Mark	With CE Mark	Standard
Input Voltage		100 V AC, 50/60 Hz	115 V AC, 50/60 Hz	220 V AC, 50/60 Hz	230 V AC, 50/60 Hz	240 V AC, 50/60 Hz	240 V AC, 50/60 Hz
Control Function		Soft Start, Speed Control, ESD Protected					
Plug Shape		USA	USA	UK	Europe	UK	Europe
Mass (g [lbs])		900 [1.98]				2300 [5.07]	

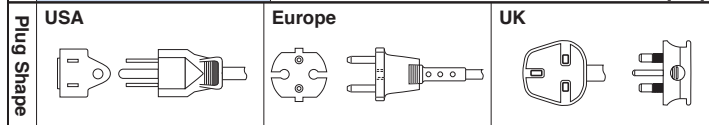

*1: An optional cord DLW9072 is required to connect with this model. Neither DLC1213A-GG nor DLC1213A-HE can be used with the DLV7400A series.

Model DLC1213A-GGB or DLC1213A-HEB + Cord DLW9072

Standard Accessories


Model	DLV7410A/DLV7410HA	DLV7420A	DLV7419A/DLV7419HA	DLV7429A
Bit NK4D	No.0 × 1.8 × 44	1	-	1
	No.0 × 2.5 × 44	1	1	1
	No.1 × 4 × 44	-	1	1
Connection Cord DLW9070	1	1	1	1
Low Torque Spring	1	-	1	-
Suspension Bail	1	1	1	1
Vacuum Sleeve	DLS2120	-	1	1
	DLS2124	-	1	1

Optional Accessories




* Please see page 39 for details.

Torque Diagrams (for reference)

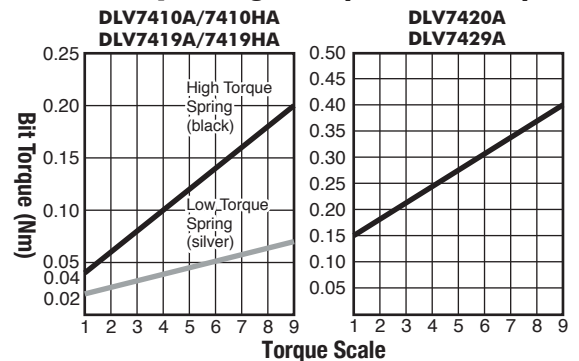

Shock value

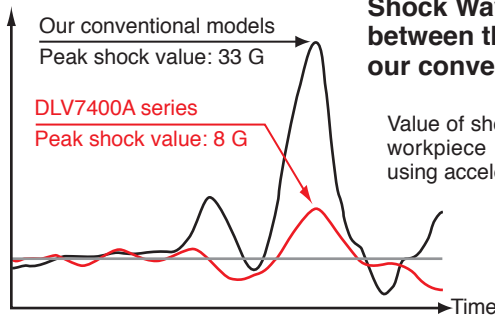


Shock Waveform Comparison between the 7400A series and our conventional models


Value of shock applied to the workpiece as measured using acceleration pickup.

External Dimensions


•DLV7410A/7410HA/7420A-BME

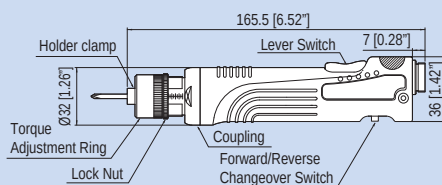

•DLV7419A/7419HA/7429A-BME

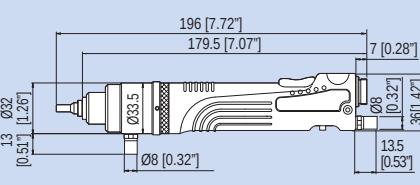

•DLC1110

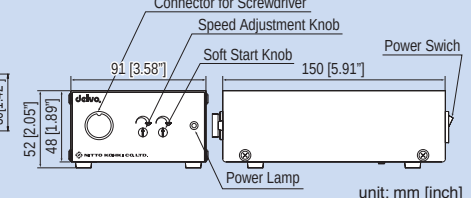

DLV5700 Series Non-CE

Features


For quality improvement and productivity enhancement

- Grounded bit installation mechanism
- ESD (electrostatic discharge) protection structure
- Low-shock for tightening (30 % less of standard models)
- Low swing bit mechanism
- Ergonomic design
- High-performance DC motor
- New clutch mechanism



Specifications

Electric Screwdriver	Model	DLV5720	DLV5720H	DLV5740	DLV5740H	DLV5750	
	Starting Method	Lever Start					
	Input Voltage	40 V DC			36 V DC		
	Torque Adjustment	Stepless					
	Torque (Nm [lbf-in])	0.02 - 0.2 [0.2 - 1.8]		0.15 - 0.4 [1.3 - 3.5]		0.1 - 0.55 [0.9 - 4.9]	
	Free Speed (min ⁻¹)	500 - 750	700 - 1000	450 - 600	1200 - 1800	670 - 1000	
	Power Consumption (W)	Approx. 10			Approx. 35		
	Screw Size (mm)	Machine Screw	1.0 - 2.3		1.6 - 2.6		1.0 - 3.0
		Tapping Screw	1.0 - 2.0		1.4 - 2.3		1.0 - 2.6
	Mass (g [lbs])	230 [0.51]			300 [0.66]		
Standard Accessories	• Bit NK4D(No.0 × 1.8 × 44): 1 pc. • Bit NK4D(No.0 × 2.5 × 44): 1 pc. • Connection Cord (1.5 m)DLW9081: 1 pc. • Suspension Bail: 1 pc. • Low Torque Spring: 1 pc.			• Bit NK4D(No.0 × 2.5 × 44): 1 pc. • Bit NK4D(No.1 × 4 × 44): 1 pc. • Connection Cord (1.5 m)DLW9081: 1 pc. • Suspension Bail: 1 pc.			




Model	DLC0350E	DLC0350F	DLC0350G	DLC0950E	DLC0950G
Input Voltage	100 V AC, 50/60 Hz	115 V AC, 50/60 Hz	230 V AC, 50/60 Hz	100 V AC, 50/60 Hz	230 V AC, 50/60 Hz
Plug Shape	USA		UK	USA	
Mass (g [lbs])	900 [1.98]			1800 [3.97]	


Optional Accessories





Torque Diagrams (for reference)

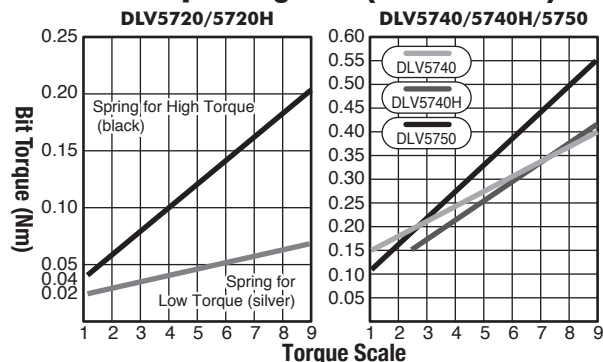

External Dimensions

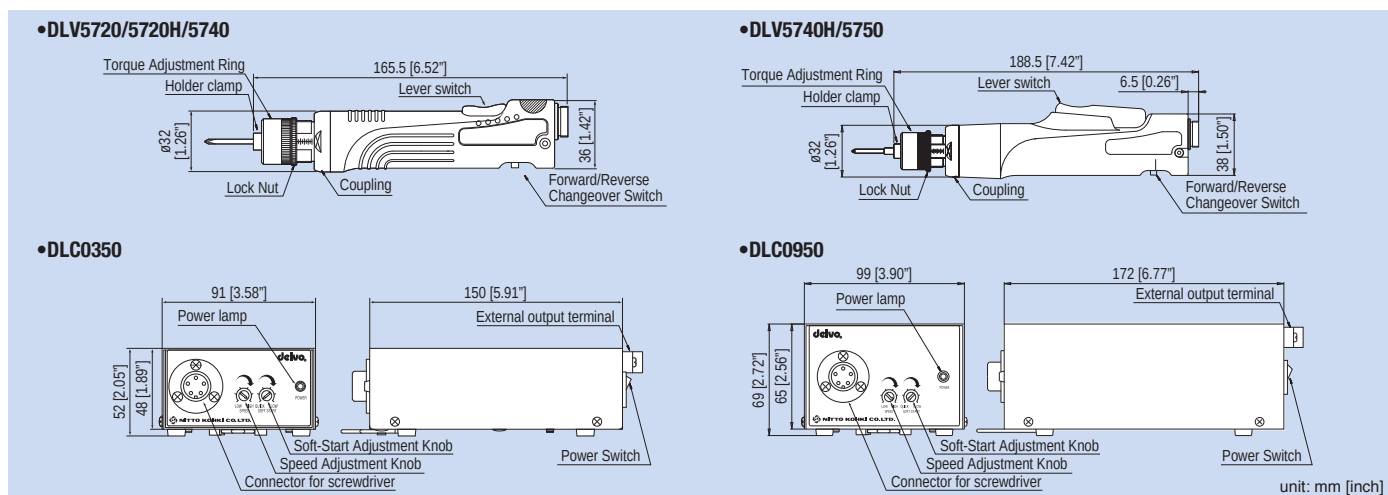



DLV7300 Series

DLV7313/7323/7333

DLV7325/7335

DLC1213A

Features

- The dedicated controller realizes high-accuracy screw tightening
- High repeatable torque accuracy
- The controller provides a soft start function. The initial speed at screwdriver startup can therefore be slowed down, effectively preventing screw heads from being scratched.
- Variable speed adjustment enables to select optimum screw tightening speed.
- DLV7325, DLV7335 meet Class 5*1 Clean Room standards

*1: Based on Nitto Kohki's standard of measurement

Specifications


	Model	Bit Shank: ø4 mm Bit Shank: Hex. 6.35 mm	Standard			Clean Room Use	
			DLV7313-CME	DLV7323-CME	DLV7333-CME	DLV7325-CME*2	DLV7335-CME*2
Electric Screwdriver				DLV7323-CKE	DLV7333-CKE	DLV7325-CKE	DLV7335-CKE
	Starting Method		Lever Start				
	Input Voltage		36 V DC				
	Torque Adjustment		Stepless				
	Torque (Nm [lbf-in])		0.03 - 0.15 [0.3 - 1.3]	0.05 - 0.5 [0.4 - 4.4]	0.3 - 1.2 [2.7 - 10.6]	0.05 - 0.5 [0.4 - 4.4]	0.3 - 1.2 [2.7 - 10.6]
	Free Speed (min ⁻¹)		700 - 1000		500 - 700	700 - 1000	500 - 700
	Power Consumption (W)		Approx. 35				
	Screw Size (mm)	Machine Screw	Up to 2.0	1.0 - 3.0	2.0 - 3.5	1.0 - 3.0	2.0 - 3.5
		Tapping Screw	Up to 1.7	1.2 - 2.6	2.0 - 3.0	1.2 - 2.6	2.0 - 3.0
	Mass (g [lbs])		350 [0.77]			400 [0.88]	

*2: Vacuum pump for suction of screw is available as option. See page 40 for details of the vacuum pump.


Controller	Model	Features	Input Voltage	Control Function	Plug Shape	Mass (g [lbs])
	DLC1213A-EN	Standard	100 V AC, 50/60 Hz	Soft start, Speed control	Asia	2300 [5.07]
	DLC1213A-FE*3	Standard	115 V AC, 50/60 Hz		UK	
	DLC1213A-GE	Standard	220 V AC, 50/60 Hz		Europe	
	DLC1213A-GG	With CE Mark	230 V AC, 50/60 Hz		UK	
	DLC1213A-GGU	With CE Mark	230 V AC, 50/60 Hz		Without Plug	
	DLC1213A-HE	Standard	240 V AC, 50/60 Hz			

*3: This model is made to order.

Plug Shape	Asia	Europe	UK



Torque Diagrams (for reference)



Standard Accessories

Model	DLV7313 -CME	DLV7323 -CME	DLV7333 -CME	DLV7323 / 31 / 33-CKE	DLV7325 -CME	DLV7335 -CME	DLV7325 / 35-CKE
Bit	NK4D No.0 × 1.8 × 44	1	-	-	-	-	-
	NK4D No.0 × 2.5 × 44	1	1	-	1	-	-
	NK4D No.1 × 3 × 44	-	-	1	-	1	-
	NK4D No.1 × 4 × 44	-	1	-	1	-	-
	NK35 No.1 × 7 × 50	-	-	-	1	-	-
	NK4D No.2 × 4 × 44	-	-	1	-	1	-
	NK36 No.2 × 4.5 × 50	-	-	-	-	-	1
	NK35 No.2 × 7 × 50	-	-	-	1	-	-
Vacuum Sleeve	DLS2124	-	-	-	1	-	-
	DLS2127	-	-	-	1	1	-
	DLS2130	-	-	-	1	1	-
	DLS2134	-	-	-	-	1	-
	DLS2135	-	-	-	-	-	1
Suspension Bail	1						

Optional Accessories




This minimizes tampering or accidental turning of the torque adjustment ring once the torque is set.


Torque Adjustment Ring Cover for DLV7303 DLW5500 (TD00333)

External Dimensions


•DLV7313/7323/7333

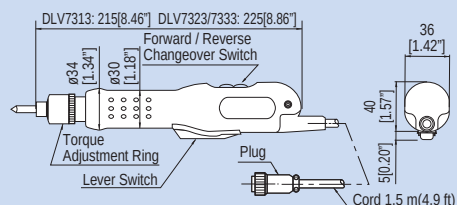



•DLV7325/7335

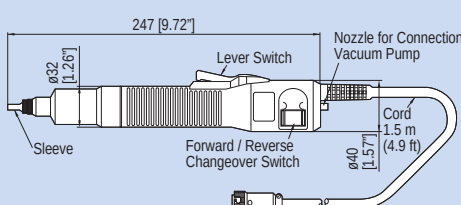

•DLC1213A

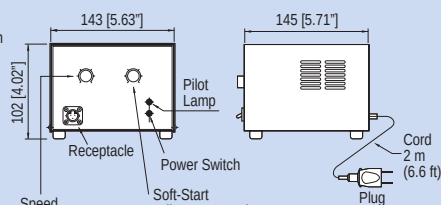

unit: mm [inch]



DLV7300-BME/BKE Series



DLC1213A





Features

Workpiece-conscious electric screwdrivers


- Statistic electricity buildup is prevented to protect workpieces from electrostatic discharge
- Minimal impact in screw tightening protects workpieces from damaging and enables stable screw tightening
- ESD (electrostatic discharge) protection structure
- Meet Class 5*1 or more Clean Room standards

*1: Based on Nitto Kohki's standard of measurement

Specifications

Specifications		ESD		ESD / Low Shock					
Electric Screwdriver	Model	Bit Shank:ø4 mm	DLV7321-BME*2	DLV7331-BME*2	DLV7319-BME*2	DLV7329-BME*2	DLV7339-BME	DLV7349-BME*2	
		Bit Shank:Hex. 6.35 mm	DLV7321-BKE	DLV7331-BKE					
	Starting Method	Lever Start							
	Input Voltage	36 V DC							
	Torque Adjustment	Stepless							
	Torque	(Nm [lbf-in])	0.05 - 0.50 [0.4 - 4.4]	0.30 - 1.20 [2.7 - 10.6]	0.20 - 0.40 [1.8 - 3.5]	0.25 - 0.55 [2.2 - 4.9]	0.45 - 0.95 [4.0 - 8.4]	0.55 - 1.20 [4.9 - 10.6]	
	Free Speed	(min ⁻¹)	700 - 1000	500 - 700	700 - 1000		500 - 700		
	Power Consumption	(W)	Approx. 35						
	Screw Size	Machine Screw	1.0 - 3.0	2.0 - 3.5	2.0 - 3.0		3.0 - 3.5		
		(mm)	1.2 - 2.6	2.0 - 3.0	2.0 - 2.6		2.6 - 3.0		
Mass	(g [lbs])	350 [0.77]			400 [0.88]				
Bit Type (mm)	For BME		For BKE		*2: These models are made to order.				
									

Model	Features	Input Voltage	Plug Shape	Control	Mass (g [lbs])
DLCL1213A-ENB	Standard	100 V AC, 50/60 Hz	USA	Grounding, Soft Start, Speed Control	2300 [5.07]
DLCL1213A-FEB*3	Standard	115 V AC, 50/60 Hz	USA		
DLCL1213A-GGB	With CE mark	230 V AC, 50/60 Hz	Europe		
DLCL1213A-HEB	Standard	240 V AC, 50/60 Hz	UK		

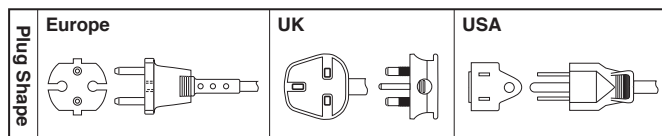

*3: This model is made to order.

Measurement Point		Conventional Product	DLV7300-B E
Handle	Static Electricity (V)	350	5
	Surface Resistance (Ω)	more than 10 ¹³	10 ⁴
Lever Switch	Static Electricity (V)	350	2
	Surface Resistance (Ω)	more than 10 ¹³	10 ⁴
Forward / Reverse Switch	Static Electricity (V)	25	2
	Surface Resistance (Ω)	more than 10 ¹³	10 ¹⁰
Power Cable	Static Electricity (V)	110	5
	Surface Resistance (Ω)	more than 10 ¹³	10 ¹⁰

Part	Material
Handle Lever Switch	Synthetic resin with carbon fiber
Power Cable	Anti-static material


* Measurement conditions (Temperature: 22 °C Humidity: 66 %)

- (1) Static electricity • Earth the measurement equipment and measuring person.
 • Grip the screwdriver five times using Ansel Edmont electronic control glove.
 • Turn on the switch of the screwdriver. • Measure each part of the screwdriver using electronic measurement equipment manufactured by Shishido electrostatic Ltd.
- (2) Surface resistance • Measure using Simco Japan surface resistivity measurement equipment.

Standard Accessories


Model	DLV7319/29-BME	DLV7339/49-BME	DLV7321-BME	DLV7331-BME	DLV7321/31-BKE
Bit	NK4D No.0 × 2.5 × 44	1	-	1	-
	NK4D No.1 × 3 × 44	-	1	-	1
	NK4D No.1 × 4 × 44	1	-	1	-
	NK35 No.1 × 7 × 50	-	-	-	1
	NK4D No.2 × 4 × 44	-	1	-	1
	NK35 No.2 × 7 × 50	-	-	-	1
Vacuum Sleeve	DLS2124	1	-	-	-
	DLS2127	1	1	-	-
	DLS2130	1	1	-	-
	DLS2134	-	1	-	-
Suspension Bail	1				

Torque Diagrams (for reference)




External Dimensions

•DLV73 1/DLV73 9

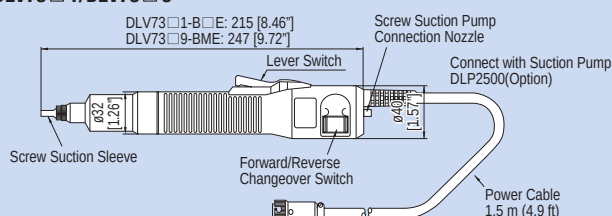

•DLC1213A- B

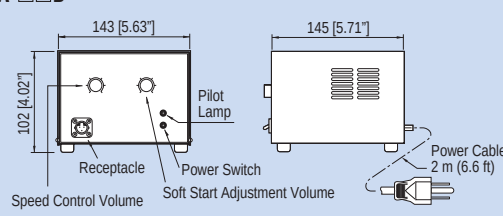

unit: mm [inch]

DLV7500/8500 Series CE




Features

Low vibration, low noise, and easy gripping in a compact design

- The easily visible torque reach light goes on when the set torque is reached
- The combination of an advanced clutch design and the auto-stop circuit assures torque accuracy
- The long life motor with a yoke made of advanced materials further assures a long service life
- Compliant with CE standard
- ESD (electrostatic discharge) protection structure (DLV7500/8500-BKE)

Specifications

Specifications		Standard		High Torque	Standard		High Torque	
Electric Screwdriver	Model	Standard Type	DLV7530-MKE	DLV7540-MKE	DLV7550-MKE	DLV8530-MKE	DLV8540-MKE	DLV8550-MKE
		ESD Protection Type	DLV7530-BKE	DLV7540-BKE	DLV7550-BKE	DLV8530-BKE	DLV8540-BKE	DLV8550-BKE
	Starting Method		Lever Start			Push to Start		
	Input Voltage		59 V DC					
	Torque Adjustment		Stepless					
	Torque (Nm [lbf-in])		0.5 - 1.7 [4.4 - 15.1]	1.2 - 2.7 [10.6 - 23.9]	2.0 - 4.5 [17.7 - 39.8]	0.5 - 1.7 [4.4 - 15.1]	1.2 - 2.7 [10.6 - 23.9]	2.0 - 4.5 [17.7 - 39.8]
	Free Speed (min ⁻¹)		1100	700	500	1100	700	500
	Screw Size (mm)	Machine Screw	2.6 - 4.0	3.5 - 5.0	4.5 - 6.0	2.6 - 4.0	3.5 - 5.0	4.5 - 6.0
Tapping Screw		2.3 - 3.5	3.0 - 4.0	4.0 - 5.0	2.3 - 3.5	3.0 - 4.0	4.0 - 5.0	
Mass (g [lbs])		650 [1.43]		750 [1.65]	650 [1.43]		750 [1.65]	
Bit Type	 unit: mm							

Measurement Point		Conventional Product	DLV7500/8500-BKE
Handle	Static Electricity (V)	350	5
	Surface Resistance (Ω)	more than 10 ¹³	10 ⁴
Lever Switch	Static Electricity (V)	350	2
	Surface Resistance (Ω)	more than 10 ¹³	10 ⁴
Forward / Reverse Switch	Static Electricity (V)	25	2
	Surface Resistance (Ω)	110	5
Connection Cable	Static Electricity (V)	110	5
	Surface Resistance (Ω)	more than 10 ¹³	10 ¹⁰

Part	Material
Handle Lever Switch	Synthetic resin with carbon fiber
Power Cable	Anti-static material

* Measurement conditions (Temperature: 22 °C Humidity: 66 %)

(1) Static electricity • Earth the measurement equipment and measuring person.

• Grip the screwdriver five times using Ansel Edmont electronic control glove.


• Turn on the switch of the screwdriver. • Measure each part of the screwdriver using electronic measurement equipment manufactured by Shishido electrostatic Ltd.

(2) Surface resistance • Measure using Simco Japan surface resistivity measurement equipment.

Standard Accessories


Model		DLV7530 / 7540 / 8530 / 8540	DLV7550 / 8550-MKE	DLV7550 / 8550-BKE
Bit NK35	No.1 × 7 × 75	1	-	-
	No.2 × 7 × 75	1	1	1
	No.3 × 7 × 50	-	1	1
Pistol Grip	DLW2300	-	1	-
	DLW2300ESD	-	-	1
Spare Carbon Brush		2		
Connection Cord		1		
Suspension Bail		1		

Torque Diagrams (for reference)


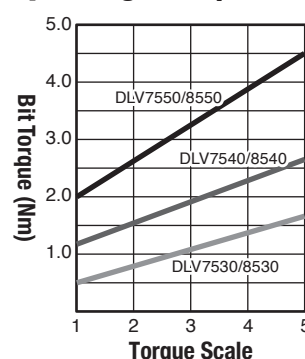


External Dimensions

DLV7500 series

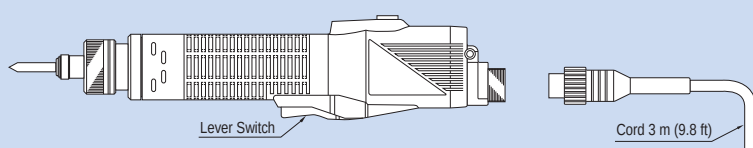

DLV8500 series

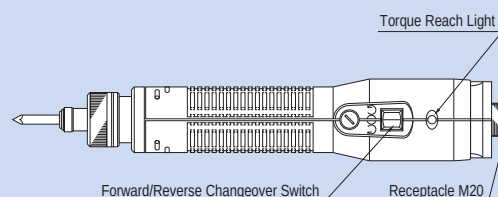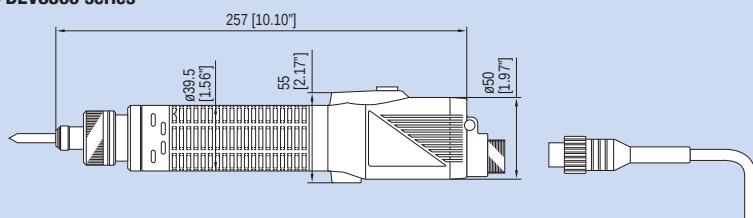

unit: mm [inch]




DLC4511-GGB





DLR1510-JE

Specifications



Model	DLC4511-GGB	DLR1510-JE
Function	Stepless speed adjustment 80 - 100 % Soft start: adjustable time setting of slow speed (max. 3 sec.) External output signals: start and torque up Electro-static discharge(ESD) control	Screw counting: OK lamp and buzzer for notification Variable non-operation time Setting protection by key lock switch Setting by touch switch for easy operation External output signals: Start, Torque up, Count up & Cycle OK
Input Voltage	230 V AC, 50/60 Hz	
Mass (g [lbs])	3500 [7.72]	5100 [11.24]
Plug Shape	Europe 	

External Dimensions

•DLC4511-GGB

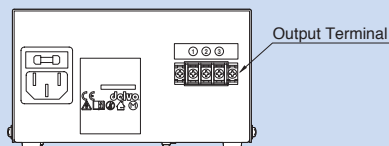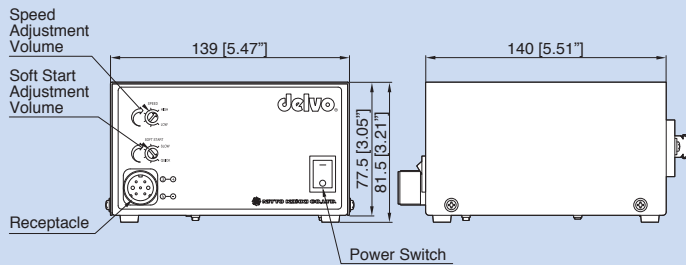


•DLR1510-JE

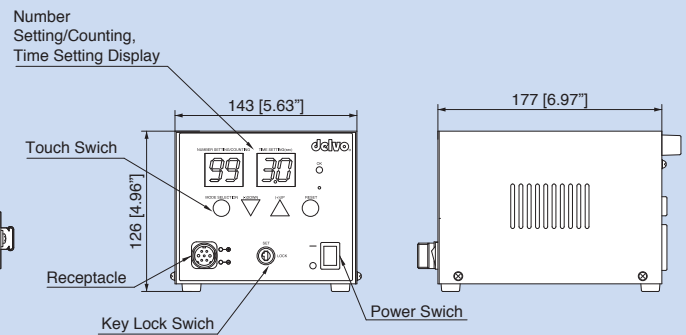

Unit: mm [inch]

MEMO

A series of horizontal dotted lines for writing.



DLV7000/8000 Series Non-CE





Features

100 / 115 V AC Direct Transformerless Precision Miniature Screw Type

- A built-in controller model saves space and facilitates layout change
- High repetitive torque accuracy
- Available with lever type (DLV7000 series) for each screw alignment and push to start type (DLV8000 series) for rapid screw tightening
- The high-speed type (DLV7031/8031) available at 1200 min⁻¹ for improving work efficiency (100 V AC only)

Specifications

Specifications		Standard				High Speed		
Electric Screwdriver	Model	100 V AC Input	DLV7020-EMN	DLV7030-EMN	DLV8020-EMN	DLV8030-EMN	DLV7031-EMN	DLV8031-EMN
		115 V AC Input	DLV7020-FME*1	DLV7030-FME*1	DLV8020-FME*1	DLV8030-FME*1		
	Starting Method	Lever Start			Push to Start		Lever Start	Push to Start
	Torque Adjustment	Stepless						
	Torque (Nm [lbf-in])	0.05 - 0.55 [0.4 - 4.9]	0.3 - 1.1 [2.7 - 9.7]	0.1 - 0.55 [0.9 - 4.9]	0.3 - 1.1 [2.7 - 8.9]	0.3 - 1.0 [2.7 - 8.9]		
	Free Speed (min ⁻¹)	900	650	900	650	1200		
	Power Consumption (W)	Approx. 25					Approx. 30	
	Screw Size	Machine Screw	1.0 - 3.0	2.0 - 3.5	1.0 - 3.0	2.0 - 3.5	2.0 - 3.0	
	Tapping Screw	1.2 - 2.6	2.0 - 3.0	1.2 - 2.6	2.0 - 3.0	2.0 - 3.0		
Mass (g [lbs])	400 [0.88]			410 [0.90]		400 [0.88]	410 [0.90]	
Bit Type			Asia		*1: These models are made to order.			
	unit: mm							
	Plug Shape							

Standard Accessories

Model	DLV7020 / 8020	DLV7030 / 8030 / 7031 / 8031
Bit NK4D	No.0 × 2.5 × 44	1
	No.1 × 3 × 44	-
	No.1 × 4 × 44	1
	No.2 × 4 × 44	-
Suspension Bail	1	


Optional Accessories



This minimizes tampering or accidental turning of the torque adjustment ring once the torque is set.


Torque Adjustment Ring Cover
DLW5300 (TD00332)

Torque Diagrams (for reference)

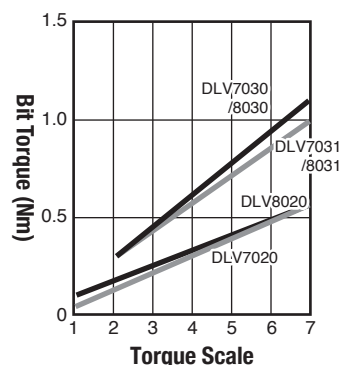


External Dimensions

•DLV7020/7030/7031

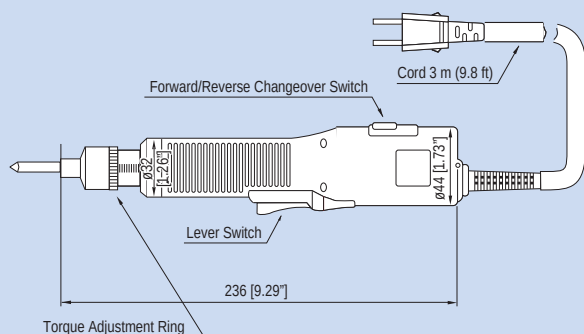

•DLV8020/8030/8031

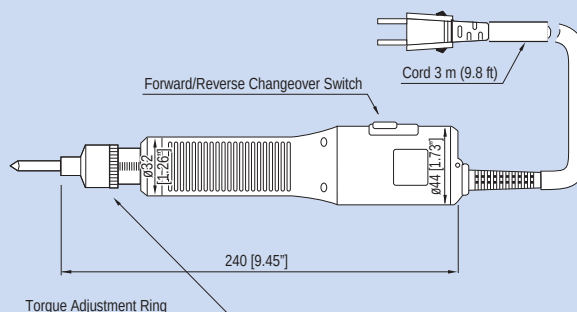

unit: mm [inch]

DLV7100/7200/8100/8200 Series Non-CE





Features

Long Time Selling, Reliable, and High Performance

- Transformerless space saving model built in automatic stop circuit
- Combination of unique clutch mechanism and automatic stop circuit maintains high repetitive torque accuracy
- The lever start type DLV7100 / 7200 series is suited for temporarily tightening screws and tightening screws set at angles
- The DLV8100 / 8200 series is push to start type for continuous screw tightening
- The high speed type DLV7200 / 8200 series enhances working efficiency
- The high torque type DLV7251 / 8150 / 8251 series is equipped with a grip, which is useful for tightening big screws like 6 mm machine screws


Specifications

Specifications																	
Model	Bit Shank: Hex. 5 mm (0.2") Bit Shank: Hex. 6.35 mm (1/4")	Standard			High Speed			High Torque	Standard			High Torque	High Speed			High Torque	
		DLV7120-FJE	DLV7130-FJE	DLV7140-FJE	DLV7221-FJE	DLV7231-FJE	DLV7241-FJE	DLV7251-FKE	DLV8120-FJE	DLV8130-FJE	DLV8140-FJE	DLV8150-FJE	DLV8221-FJE	DLV8231-FJE	DLV8241-FJE	DLV8251-FKE	
		DLV7120-FKE	DLV7130-FKE	DLV7140-FKE	DLV7221-FKE	DLV7231-FKE	DLV7241-FKE		DLV8120-FKE	DLV8130-FKE	DLV8140-FKE	DLV8150-FKE	DLV8221-FKE	DLV8231-FKE	DLV8241-FKE		
Electric Screwdriver	Starting Method		Lever Start						Push to Start								
	Input Voltage		115 V AC, 50/60 Hz														
	Torque Adjustment		Stepless														
	Torque (Nm)		0.35 - 0.70	0.5 - 1.7	1.2 - 3.0	0.35 - 0.70	0.5 - 1.7	1.2 - 3.0	2.0 - 4.5	0.35 - 0.70	0.5 - 1.7	1.2 - 3.0	2.0 - 4.5	0.35 - 0.70	0.5 - 1.7	1.2 - 3.0	2.0 - 4.5
	[lbf-in]		[3.10 - 6.20]	[4.4 - 15.1]	[10.6 - 26.6]	[3.10 - 6.20]	[4.4 - 15.1]	[10.6 - 26.6]	[17.7 - 39.8]	[3.10 - 6.20]	[4.4 - 15.1]	[10.6 - 26.6]	[17.7 - 39.8]	[3.10 - 6.20]	[4.4 - 15.1]	[10.6 - 26.6]	[17.7 - 39.8]
	Free Speed (min ⁻¹)		900	900	600	1800	1800	1100	700	900	900	600	400	1800	1800	1100	700
	Power Consumption (W)		Approx. 35			Approx. 45			Approx. 35			Approx. 45					
	Screw Size (mm)		Machine Screw	2.6 - 3.0	2.6 - 4.0	3.5 - 5.0	2.6 - 3.0	2.6 - 4.0	3.5 - 5.0	4.5 - 6.0	2.6 - 3.0	2.6 - 4.0	3.5 - 5.0	4.5 - 6.0	2.6 - 3.0	2.6 - 4.0	3.5 - 5.0
		Tapping Screw	2.6 - 3.0	2.3 - 3.5	3.5 - 4.0	2.6 - 3.0	2.3 - 3.5	3.0 - 4.0	4.5 - 5.0	2.6 - 3.0	2.3 - 3.5	3.5 - 4.0	4.5 - 5.0	2.6 - 3.0	2.3 - 3.5	3.0 - 4.0	4.0 - 5.0
Mass (g [lbs])		700 [1.54]						890 [1.96]	690 [1.52]			890 [1.96]	690 [1.52]			890 [1.96]	
Bit Type (mm)	For FJE		For FKE				Plug Shape	Asia	* All models of FJE / FKE series are made to order.								
																	

Standard Accessories


Model	FJE	FKE except DLV7251 / 8150 / 8251-FKE	DLV7251 / 8150 / 8251-FKE
Bit			
NK31 No.1 × 6 × 70	1	-	-
NK31 No.2 × 6 × 70	1	-	-
NK31 No.1 × 7 × 75	-	1	-
NK35 No.2 × 7 × 75	-	1	1
NK35 No.3 × 7 × 50	-	-	1
Pistol Grip (DLW2300)	-	1	1
Spare Carbon Brush		2	
Connection Cord		1	
Suspension Bail		1	

Torque Diagrams (for reference)

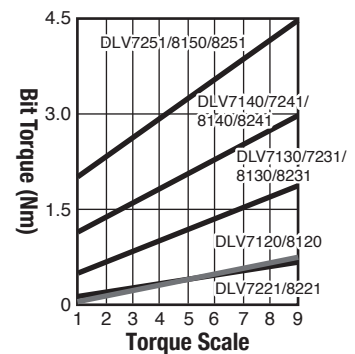


External Dimensions


•DLV7120/7130/7140/7221/7231/7241

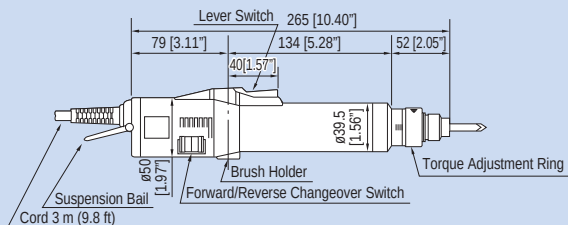


•DLV8120/8130/8140/8221/8231/8241

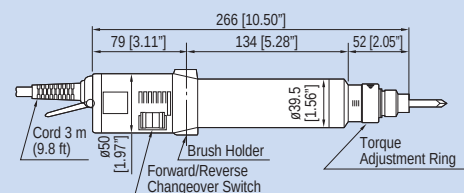

•DLV7251

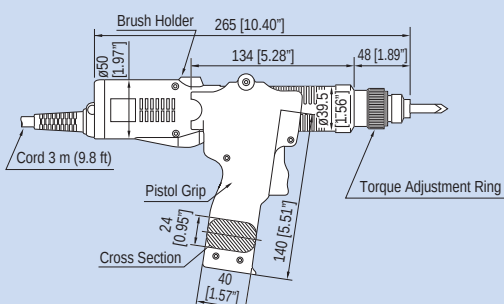

•DLV8150/8251

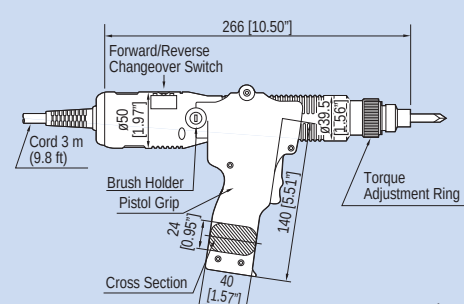

unit: mm [inch]

Non-CE



The most popular models have been redesigned

- Equipped with bit grounding mechanism
- Long-life cam is utilized
- The clear plastic torque adjustment ring cover minimizes unintentional tampering of the preset torque
- The changeover switch enables operators to change forward/reverse rotation with a single hand
- The ergonomically designed grip can be held tightly to resist against tightening reaction force, resulting in reduced operator fatigue

Electric Screwdriver	Model	Plug Shape: USA	DLV7124-MKE	DLV7134-MKE	DLV7144-MKE	DLV8124-MKE	DLV8134-MKE	DLV8144-MKE	DLV8154-MKE	DLV8224-MKE	DLV8234-MKE	DLV8244-MKE	
		Plug Shape: UK	DLV7124-MKH	DLV7134-MKH	DLV7144-MKH	DLV8124-MKH	DLV8134-MKH	DLV8144-MKH	DLV8154-MKH	DLV8224-MKH	DLV8234-MKH	DLV8244-MKH	
	Starting Method		Lever Start				Push to Start						
	Input Voltage		230 V AC, 50/60 Hz										
	Torque Adjustment		Stepless										
	Torque (Nm) [lbf·in]		0.25 - 0.75 [2.2 - 6.6]	0.5 - 1.7 [4.4 - 15.1]	1.2 - 3.0 [10.6 - 26.6]	0.25 - 0.75 [2.2 - 6.6]	0.5 - 1.7 [4.4 - 15.1]	1.2 - 3.0 [10.6 - 26.6]	2.0 - 4.5 [17.7 - 39.8]	0.35 - 0.7 [3.1 - 6.2]	0.5 - 1.7 [4.4 - 15.1]	1.2 - 3.0 [10.6 - 26.6]	
	Free Speed (min ⁻¹)		900		600		900		600		400	2000	1800
Power Consumption (W)		35						45					
Screw Size (mm)	Machine Screw	2.6 - 3.0	2.6 - 4.0	3.5 - 5.0	2.6 - 3.0	2.6 - 4.0	3.5 - 5.0	4.5 - 6.0	2.6 - 3.0	2.6 - 4.0	3.5 - 5.0		
	Tapping Screw	2.3 - 3.0	2.3 - 3.5	3.0 - 4.0	2.3 - 3.0	2.3 - 3.5	3.0 - 4.0	4.5 - 5.0	2.3 - 3.0	2.3 - 3.5	3.0 - 4.0		
Mass (g [lbs])		720 [1.59]				710 [1.57]				910 [2.01]		710 [1.57]	
Bit Type	 unit: mm		Plug Shape		For MKE		For MKH						
			USA 		UK 								

Please contact us for 5 mm bit type.

Model		MKE/MKH	8154-MKE/MKH
Bit NK35	No.1 × 7 × 75	1	-
	No.2 × 7 × 75	1	1
	No.3 × 7 × 50	-	1
Spare Carbon Brush		2	
Suspension Bail		1	

Figure 10 consists of two side-by-side line graphs. Both graphs plot Bit Torque (Nm) on the y-axis (ranging from 0 to 5.0 in increments of 0.5) against Torque Scale on the x-axis (ranging from 1 to 9 in increments of 1). The left graph shows four data series for bit sizes DLV8154, DLV7144/8144, DLV7134/8134, and DLV7124/8124. The right graph shows three data series for bit sizes DLV8244, DLV8234, and DLV8224. In all cases, the bit torque increases linearly with the torque scale.

Torque Scale	DLV8154 (Nm)	DLV7144/8144 (Nm)	DLV7134/8134 (Nm)	DLV7124/8124 (Nm)	DLV8244 (Nm)	DLV8234 (Nm)	DLV8224 (Nm)
1	2.1	1.2	0.6	0.2	1.2	0.5	0.2
2	2.6	1.6	0.8	0.3	1.6	0.7	0.3
3	3.1	2.0	1.0	0.4	2.0	0.9	0.4
4	3.6	2.4	1.2	0.5	2.4	1.1	0.5
5	4.1	2.8	1.4	0.6	2.8	1.3	0.6
6	4.6	3.2	1.6	0.7	3.2	1.5	0.7
7	5.1	3.6	1.8	0.8	3.6	1.7	0.8
8	5.6	4.0	2.0	0.9	4.0	1.9	0.9
9	6.1	4.4	2.2	1.0	4.4	2.1	1.0

•DLV7124 / 7134 / 7144

Technical drawing of the DLV7124 / 7134 / 7144 torque wrench. Dimensions (mm [inches]):

- Bit: 48 [1.89"]
- Torque Adjustment Ring: 134 [5.28"]
- Torque Adjustment Ring Cover: 134 [5.28"]
- Torque Scale: 134 [5.28"]
- Brush Holder: 263 [10.40"]
- Lever: 134 [5.28"]
- Changeover Switch: 134 [5.28"]
- Cord 3 m (9.8 ft)
- Ø50 [1.97"]
- Ø39.5 [1.56"]

•DLV8124 / 8134 / 8144 / 8224 / 8234 / 8244

Technical drawing of the DLV8124 / 8134 / 8144 / 8224 / 8234 / 8244 torque wrench. Dimensions (mm [inches]):

- Bit: 51 [2.01"]
- Torque Adjustment Ring: 134 [5.28"]
- Torque Adjustment Ring Cover: 134 [5.28"]
- Torque Scale: 134 [5.28"]
- Brush Holder: 264 [10.40"]
- Lever: 134 [5.28"]
- Changeover Switch: 134 [5.28"]
- Cord 3 m (9.8 ft)
- Ø50 [1.97"]
- Ø39.5 [1.56"]

•DLV8154

Technical drawing of the DLV8154 torque wrench. Dimensions (mm [inches]):

- Bit: 51 [2.01"]
- Torque Adjustment Ring: 134 [5.28"]
- Torque Adjustment Ring Cover: 134 [5.28"]
- Torque Scale: 134 [5.28"]
- Brush Holder: 264 [10.40"]
- Lever: 134 [5.28"]
- Changeover Switch: 134 [5.28"]
- Cord 3 m (9.8 ft)
- Ø50 [1.97"]
- Ø39.5 [1.56"]
- 24 [0.95"]
- 40 [1.57"]

unit: mm [inch]

unit: mm [inch]

Screw Fastening Counter Series

Prevents human error with various functions. * Special models available on request

The error is detected based on the set tightening time.

Self adjustable timer function

The optimum value of screw tightening time is set from the actual screw tightening.





The best time is
X seconds per screw



Count Correction Function

Does not count when error is detected.




Error !



Human error
prevention

Link Connection Function

Multiple screwdrivers can be linked.
The other screwdrivers will be in standby state.

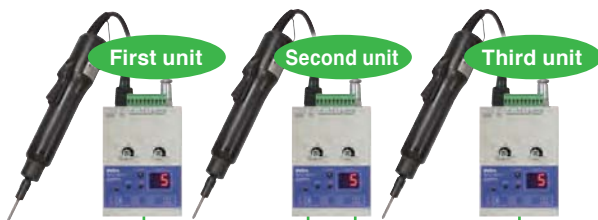


Link Connection

Link Connection

Count Return Function

The remaining number of screw tightening
is returned when the rotation is reversed.




Reverse



Return one count

Driver Lock Function

Unnecessary screwdrivers are locked in conjunction
with the workpiece sensor.

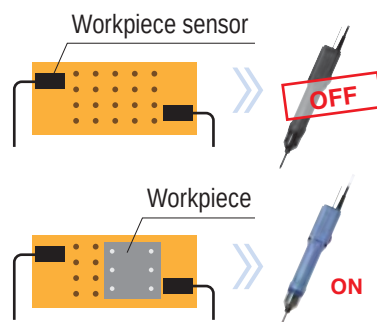

Lock
when workpiece is
not in place !




Screw Fastening Counter

DLR5640-WN

- Functions of the controller and counter are integrated into a single unit.
- Equipped with Linear Start Function that gradually increases the rotation speed at start.
- Universal power input for use anywhere in the world.




Front and Rear Panels

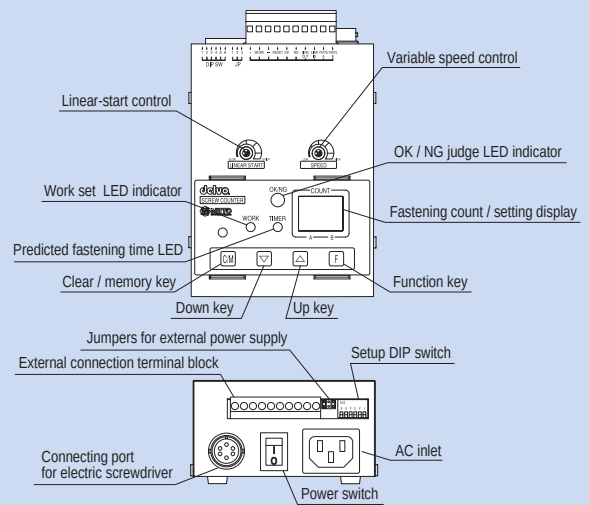


DLR5040A-WE

- Compact and lightweight model.
- A wide range of SPC screwdriver types are available.

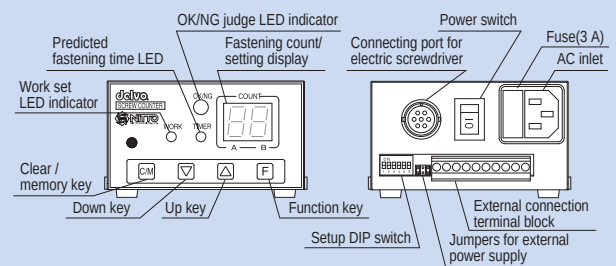

DLR5340-WE

- Three dedicated screwdrivers can be connected.
- Eight kinds of screw fastening conditions can be stored in internal memory.

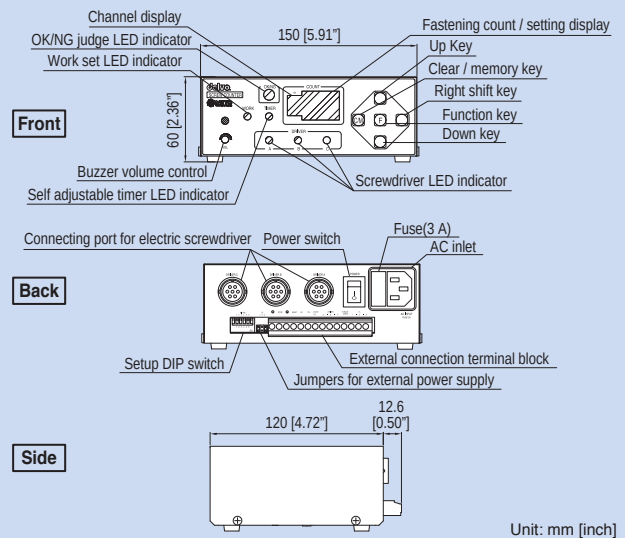

Unit: mm [inch]

Function List

	Self adjusting timer function	Count correct function	Link connection function	Count return function	Driver lock function	Number of connecting ports
DLR5640-WN	•	•	•	•	•	1
DLR5040A-WE	•	•	•	•	•	1
DLR5340-WE	•	•		•	•	3



Features


The self-adjustable timer function automatically assesses the time required to complete fastening each screw and reflects it on the judging time setting

- Ideally suited for the assembly lines of vehicles and electrical equipment requiring reliable screw fastening
- The controller receives signals from electric screwdrivers to provide highly reliable screw fastening control
- Functions of the controller and counter are integrated into a single unit
- Count Return Function: When a screw is loosened, a reverse signal output from the electric screwdriver reverses the count by one
- The self-adjustable timer function automatically assesses the time required to complete tightening each screw and reflects it on the judging time setting
- The Count Correction Function does not count elevated screws or double fastening as fastening errors
- External Count Function: To be available to various assembling jobs, the DLR5640 enables counting of two kinds of parts (up to 9 counts each) in addition to the screw tightening counting. These kinds of counting can be used together.

- Link Connection Function: You can build up a simple sequential screw tightening system by connecting the DLR5640 screw tightening counters in series without using any external controller such as a programmable controller
- Driver Lock Function prevents unexpected start of screwdrivers
- Desktop or wall-hung installation is available
- Input voltage range from 100 V AC to 240 V AC is acceptable in any part of the world

Specifications

Model	DLR5640-WN
Count	1 - 99
Counting Method	Count-up / Count-down
Count Correction Function	Count normal fastening only
Self Adjustable Timer Setting	0.01 to 0.99 sec.
Work Detection Function	Yes (1 terminal) / No
External Count Input	2 terminals (PARTS A / PARTS B)
Work Installation Timer Setting	0 to 9.5 sec.
OK Output Timer Setting	0 to 9.5 sec.
NG Alarm	ON(1) / ON(2) / OFF
OK Buzzer	ON(1) / ON(2) / ON(3) / OFF
Count Return Function	ON / OFF
NG Judge Timing	WORK SET / DRIVER ON
Automatic / Manual OK Judge	AUTO / MANUAL
Screwdriver Lock Function	ON / OFF
Multiple Link	Up to 10 counters can be connected.
External Inputs on Terminal Block	SENSOR / RESET / LINK-IN / PARTS A / PARTS B
External Outputs on Terminal Block	OK / NG / LINK-OUT
Parameter Memory	Parameters stored in internal nonvolatile memory
Screwdriver Control	SPEED / LINEAR START
Input Voltage	100 - 240 V AC, 50/60 Hz
Screwdriver Power Supply	33 V DC, 1.5 A
External Dimensions (mm [inch])	W101 x D140 x H57 [W3.98" x D5.51" x H2.24"]
Mass (g [lbs])	800 [1.76]
Accessories	2 m Power cord with USA plug Suspension bail (2 pcs.)




Example of use together with a sensor available in the market



The example of installation

LINK Function (Commom to DLR5040A & DLR5640)

When counters are connected and activated in the screw fastening sequence as shown below, all screwdrivers are on standby except the first one in the sequence. Only when the first screw fastening is finished, can the next screwdriver change from standby to ready. When the last fastening in the sequence is finished, the first screwdriver is once again ready and the sequence can be repeated again.
N.B. Up to 10 screwdriver/counter sets can be connected to the LINK.

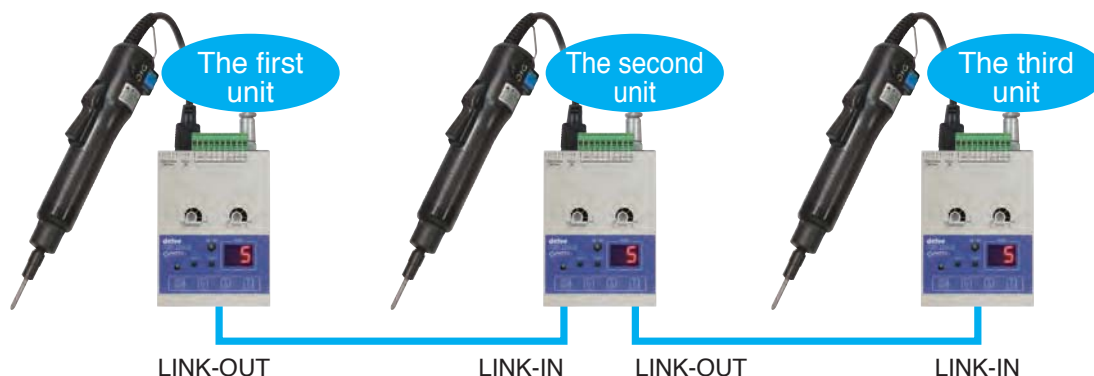

Screwdrivers designed for DLR5640-WN Non-CE



DLV7410A/7410HA/7420A-SPC




DLV7321/7331-SPC



DLR5640-WN

Specifications

Model		DLV7410A-SPC	DLV7410HA-SPC	DLV7420A-SPC	DLV7321-SPC	DLV7331-SPC
Starting Method		Lever Start				
Torque Adjustment		Stepless				
Torque (Nm [lbf-in])		0.02 - 0.2 [0.2 - 1.8]		0.15 - 0.4 [1.3 - 3.5]	0.1 - 0.5 [1.9 - 4.4]	0.3 - 1.2 [2.7 - 10.6]
Free Speed (min ⁻¹)		500 - 750	700 - 1000	450 - 600	300 - 1000	200 - 700
Power Consumption (W)		Approx. 10			Approx. 35	
Screw Size (mm)	Machine Screw	1.0 - 2.3		1.6 - 2.6	1.0 - 3.0	2.0 - 3.5
	Tapping Screw	1.0 - 2.0		1.4 - 2.3	1.2 - 2.6	2.0 - 3.0
Electrostatic Countermeasure		Complied with EN100015-1				
Mass (g [lbs])		230 [0.51]			350 [0.77]	
Cord Length (m)		1.5 (with connector)				
Grounding Bit Feature		Equipped as standard				



Combinations with Electric Screwdrivers

Screwdriver Model	Connection	Remarks
DLV7410A / 7410HA / 7420A-SPC	The cord comes with screwdriver	Screwdriver for the screw fastening counter only
DLV7321 / 7331-SPC	Direct connection to power source	
DLV7410A / 7410HA / 7420A / 7419A / 7419HA / 7429A-BMN	Optional conversion cord (TD02925 DLW9072)	General-purpose screwdriver *1

*1: The Count Return Function is not available.

Optional Accessories



DLW9072(TD02925)



Torque Adjustment Ring Cover
(DLW5700: DLV7400A-SPC
DLW5300: DLV7300-SPC)

This minimizes tampering or accidental turning of the torque adjustment ring once the torque is set.



Specifications

Model	DLR5040A-WE
Count	1 - 99
Counting Method	Count-up / Count-down
Count Correction Function	Count normal fastening only
Self Adjustable Timer Setting	0.01 to 0.99 sec.
Work Detection Function	Yes (1 terminal) / No
External Count Input	2 terminals (PARTS A / PARTS B)
Work Installation Timer Setting	0 to 9.5 sec.
OK Output Timer Setting	0 to 9.5 sec.
NG Alarm	ON(1) / ON(2) / OFF
OK Buzzer	ON(1) / ON(2) / ON(3) / OFF
Count Return Function	ON / OFF
NG Judge Timing	WORK SET / DRIVER ON
Automatic / Manual OK Judge	AUTO / MANUAL
Screwdriver Lock Function	ON / OFF
Multiple Link	Up to 10 counters can be connected.
External Inputs on Terminal Block	SENSOR / RESET / LINK-IN / PARTS A / PARTS B
External Outputs on Terminal Block	OK / NG / LINK-OUT
Parameter Memory	Parameters stored in internal nonvolatile memory
Input Voltage	100 - 240 V AC, 50/60 Hz
External Dimensions (mm [inch])	W100 x D120 x H60 [W3.94" x D4.72" x H2.36"]
Mass (g [lbs])	470 [1.04]

Accessory: 2 m cord with UL three-prong plug. This product is for use outside Japan.

Features

For prevention of human fastening errors and enhanced fastening management accuracy

- Ideally suited for the assembly lines of vehicles and electrical equipment requiring reliable screw fastening
- The controller receives signals from electric screwdrivers to provide highly reliable screw fastening control
- Count Return Function: When a screw is loosened, a reverse signal output from the electric screwdriver reverses the count by one
- The Count Correction Function does not count elevated screws or double fastening
- Input voltage range from 100 to 240 V AC is acceptable in any part of the world
(The screwdrivers to be used in combination with the counter require input power supplies that are written on the respective nameplate)
- Link Connection Function: You can build up a simple sequential screw tightening system by connecting the DLR5040A-WE screw tightening counters in series without using any external controller such as a programmable controller
- Driver Lock Function prevents unexpected start of screwdrivers
- Compact and Lightweight (Compared with our conventional models decreased by 30 % in volume and by 38 % in mass)
- SPC type screwdrivers for DLR5040A-WE are designed on the basis of established transformerless screwdrivers

LINK Function

When counters are connected and activated in the screw fastening sequence as shown below, all screwdrivers are on standby except the first one in the sequence. Only when the first screw fastening is finished, can the next screwdriver change from standby to ready. When the last fastening in the sequence is finished, the first screwdriver is once again ready and the sequence can be repeated again.

N.B. Up to 10 screwdriver/counter sets can be connected to the LINK.



Example of use together with a sensor available in the market

DLR5340-WE Non-CE



Specifications

Model	DLR5340-WE
Count	0 - 99
Counting Method	Count-up / Count-down
Count Correction Function	Count normal fastening only
Self Adjustable Timer Setting	0.01 to 2.50 sec.
Work Detection Function	Yes (1 terminal) / No
Work Installation Timer Setting	0 to 9.5 sec.
OK Output Timer Setting	0 to 9.5 sec.
NG Alarm	ON(1) / ON(2) / OFF
OK Buzzer	ON(1) / ON(2) / ON(3) / ON(4) / ON(5) / OFF
Count Return Function	ON / OFF
Screwdriver Lock Function	ON / OFF
Screwdriver Cord Connection	Single cord connection (Signal and power lines)
External Inputs on Terminal Block	SENSOR / RESET / TORQUE CHECK / ch1/2/3
External Outputs on Terminal Block	OK / NG / COUNT-UP / DRIVER A/B/C
Input Voltage	100 - 240 V AC, 50/60 Hz
External Dimensions (mm [inch])	W150 x D120 x H60 [W5.91" x D4.72" x H2.36"]
Mass (g [lbs])	620 [1.37]

Accessory: 2 m cord with UL three-prong plug. This product is for use outside Japan.

Features

Up to three sets screwdrivers can be connected to one counter

- Up to eight kinds of screw fastening conditions can be stored in internal memory for a wide variety of assembly work
- Count-up signal outputs
- Space saving
- The Count Correction Function does not count elevated screws or double fastening as fastening errors
- Count Return Function: When a screw is loosened, a reverse signal output from the electric screwdriver reverses the count by one

Dedicated Screwdrivers for DLR5040A-WE and DLR5340-WE Non-CE

delvo

Small



Specifications


Specifications		Miniature Screw (1.0 - 3.5 mm)					
Model	Lever Start	DLV7020-SPC	DLV7030-SPC	DLV7031-SPC	-	-	-
	Push to Start	-	-	-	DLV8020-SPC	DLV8030-SPC	DLV8031-SPC
Input Voltage		100 V AC, 50/60 Hz					
Torque Adjustment		Stepless					
Torque (Nm [lbf-in])		0.05 - 0.55 [0.4 - 4.9]	0.30 - 1.10 [2.7 - 9.7]	0.30 - 1.00 [2.7 - 8.9]	0.10 - 0.55 [0.9 - 4.9]	0.30 - 1.10 [2.7 - 9.7]	0.30 - 1.00 [2.7 - 8.9]
Free Speed (min ⁻¹)		900	650	1200	900	650	1200
Power Consumption (W)		Approx. 25		Approx. 30	Approx. 25		Approx. 30
Screw Size (mm)	Machine Screw	1.0 - 3.0	2.0 - 3.5	2.0 - 3.0	1.0 - 3.0	2.0 - 3.5	2.0 - 3.0
	Tapping Screw	1.2 - 2.6	2.0 - 3.0		1.2 - 2.6	2.0 - 3.0	
Bit Type		A					
Mass (g [lbs])		380 [0.84]			390 [0.86]		
Cord Length (m)		3 (with connector)					
Bit Grounding		Equipped as standard					



		Machine Screw(2.6 - 8.0 mm)				
Model	Lever Start	DLV7120-SPC	DLV7130-SPC	DLV7140-SPC	DLV7231-SPC	DLV7241-SPC
	Push to Start	DLV8120-SPC	DLV8130-SPC	DLV8140-SPC	DLV8231-SPC	DLV8241-SPC
Input Voltage		100 V AC, 50/60 Hz *1				
Torque Adjustment		Stepless				
Torque (Nm [lbf-in])		0.35 - 0.70 [3.10 - 6.20]	0.50 - 1.70 [4.4 - 15.1]	1.20 - 3.00 [10.6 - 26.6]	0.50 - 1.70 [4.4 - 15.1]	1.20 - 3.00 [10.6 - 26.6]
Free Speed (min ⁻¹)		1000		700	2000	1200
Power Consumption (W)		35			45	
Screw Size (mm)	Machine Screw	2.6 - 3.0	2.6 - 4.0	3.5 - 5.0	2.6 - 4.0	3.5 - 5.0
	Tapping Screw	2.3 - 3.0	2.5 - 3.5	3.0 - 4.0	2.5 - 3.5	3.0 - 4.0
Bit Type		B *2				
Mass (g [lbs])		710 [1.57] (7100series) / 670 [1.48] (8100series)			710 [1.57] (7200series) / 670 [1.48] (8200series)	
Cord Length (m)		3 (with connector)				
Bit Grounding		Equipped as standard				



		Machine Screw (2.6 - 8.0 mm)	
Model	Lever Start	-	DLV7251-SPC
	Push to Start	DLV8150-SPC	DLV8251-SPC
Input Voltage		100 V AC, 50/60 Hz *1	
Torque Adjustment		Stepless	
Torque (Nm [lbf-in])		2.0 - 4.5 [17.7 - 39.8]	
Free Speed (min ⁻¹)		450	700
Power Consumption (W)		45	
Screw Size (mm)	Machine Screw	4.5 - 6.0	
	Tapping Screw	4.0 - 5.0	
Bit Type		C	
Mass (g [lbs])		810 [1.79]	
Cord Length (m)		3 (with connector)	
Bit Grounding		Equipped as standard	

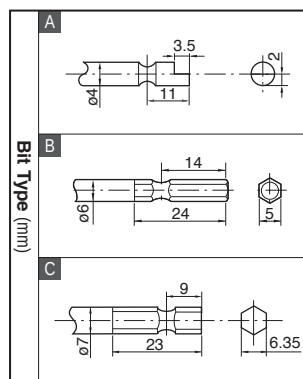

		Machine Screw(2.6 - 8.0 mm)					
Model	Lever Start	DLV30A06L-SPC	DLV30A12L-SPC	DLV30A20L-SPC	DLV45A06L-SPC	DLV45A12L-SPC	DLV70A06L-SPC
	Push to Start	DLV30A06P-SPC	DLV30A12P-SPC	DLV30A20P-SPC	DLV45A06P-SPC	DLV45A12P-SPC	DLV70A06P-SPC
Input Voltage		100 V AC, 50/60 Hz *1					
Torque Adjustment		Stepless					
Torque (Nm [lbf-in])		0.4 - 1.6 / 1.2 - 3.0 [3.5 - 14.2 / 10.6 - 26.6]			2.0 - 4.5 [17.7 - 39.8]		3.8 - 7.0 [33.6 - 62.0]
Free Speed (min ⁻¹)		650	1200	2000	650	1200	650
Power Consumption (W)		45					
Screw Size (mm)	Machine Screw	2.6 - 5.0			4.5 - 6.0		5.0 - 8.0
	Tapping Screw	2.5 - 4.0			4.0 - 5.0		4.5 - 6.0
Bit Type		B *2			C		
Mass (g [lbs])		700 [1.54]			870 [1.92] with pistol grip		
Cord Length (m)		3 (with connector)					
Bit Grounding		Equipped as standard					

*1: Please contact us for other voltage availabilities. *2: Please contact us for 6.35 mm bit type.

Optional Accessories



Torque Adjustment Ring Cover

DLW5200: DLV7100/7200/8100/8200-SPC
DLW5300: DLV7000/8000-SPC

- This minimizes tampering or accidental turning of the torque adjustment ring once the torque is set.
- Flanged coupling DLW9011 can not be mounted on SPC type



Pistol Grip

DLW2300: DLV7100/7200/
8100/8200/30/45/70-SPC


- Suitable for horizontal operation



TD04061 SPC cord for

commercial power source (optional)

- Dedicated screwdrivers can be directly plugged in commercial power source.



delvo Brushless Type

A Series (For Automation) Model DLV30A/45A/70A Non-CE

DLV45A06A-F

DLV45A12A-N





Features

For automatic assembly robot

- Three series of screwdrivers can be mounted on the XY robot
- Automatic screw tightening achieves a labor-saving or unattended process
- Long-life brushless motors are incorporated in the electric screwdrivers
- Standard coupling, flange coupling, and left-hand thread coupling are available for installation
- The electric screwdriver generates the torque-up signal
- The screwdrivers can be connected to a sequencer to control starting, forward rotation, and reverse rotation
- An electrical noise preventive measure is employed to avoid malfunction. Each input/output signal is insulated from a screwdriver's internal circuit by a photocoupler.

Specifications


Specifications		Low Speed		Standard		High Speed		Low Speed		Standard		Low Speed	
Electric Screwdriver	Model : Bit	Standard coupling	DLV30A06A-N(AA) : J	DLV30A12A-N(AA) : J	DLV30A20A-N(AA) : J	DLV45A06A-N(AA) : K	DLV45A12A-N(AA) : K	DLV70A06A-N(AA) : K					
		Coupling with flange	DLV30A06A-F(AA) : J	DLV30A12A-F(AA) : J	DLV30A20A-F(AA) : J	DLV45A06A-F(AA) : K	DLV45A12A-F(AA) : K	DLV70A06A-F(AA) : K					
		Coupling with M41 screw	DLV30A06A-M(AA) : J	DLV30A12A-M(AA) : J	DLV30A20A-M(AA) : J	DLV45A06A-M(AA) : K	DLV45A12A-M(AA) : K	DLV70A06A-M(AA) : K					
	Input Voltage		100 V AC, 50/60 Hz										
	Torque (Nm [lbf·in])	Low Torque Spring*1	0.4 - 1.6 [3.5 - 14.2]					2.0 - 4.5 [17.7 - 39.8]		3.8 - 7.0 [33.6 - 62.0]			
		High Torque Spring*2	1.2 - 3.0 [10.6 - 26.6]										
	Free Speed	(min ⁻¹)	650	1200	2000	650	1200	650					
	Screw	Machine Screw	2.6 - 5.0					4.5 - 6.0		5.0 - 8.0			
	Size (mm)	Tapping Screw	2.5 - 4.0					4.0 - 5.0		4.5 - 6.0			
	Mass (g [lbs])	Standard coupling	700 [1.54]					780 [1.72]					
		Coupling with flange	760 [1.68]					840 [1.85]					
		Coupling with M41 screw	740 [1.63]					820 [1.81]					
Power Consumption (W)		45											
Starting Method		External input signal											
Input signal		Start signal / Forward signal / Reverse signal (5 - 24 V DC)											
Output signal		Torque-up signal (Voltage under 30 V DC and current 20 mA)											
Standard Accessories		• Bit NK31 (No.2 × 6 × 70): 1 pc. • Low torque spring: 1 pc.					• Bit NK35 (No.2 × 7 × 75): 1 pc.						
Bit Type (mm)	J	*3					K						
													
*1: Standard Accessory *2: Installed *3: DLV30A is available upon request for use with 6.35 mm hex. shank bits.													

*1: Standard Accessory
*2: Installed
*3: DLV30A is available upon request for use with 6.35 mm hex. shank bits.

Optional Accessories



Torque Diagrams (for reference)



Screwdriver Cable Breakdown List

Power/Input Signal Cable


Color	Details
Green	Power input
Yellow	Power input
Blue	Bit earth
White	Input signal common (Vcc)
Black	Start signal input
Orange	Forward signal input
Gray	Reverse signal input

Power input voltage: 100 V AC

Output Signal Cable

Color	Details
White	Torque-up signal output
Black	Ground


Power Input/Output Signal Schematic Diagram

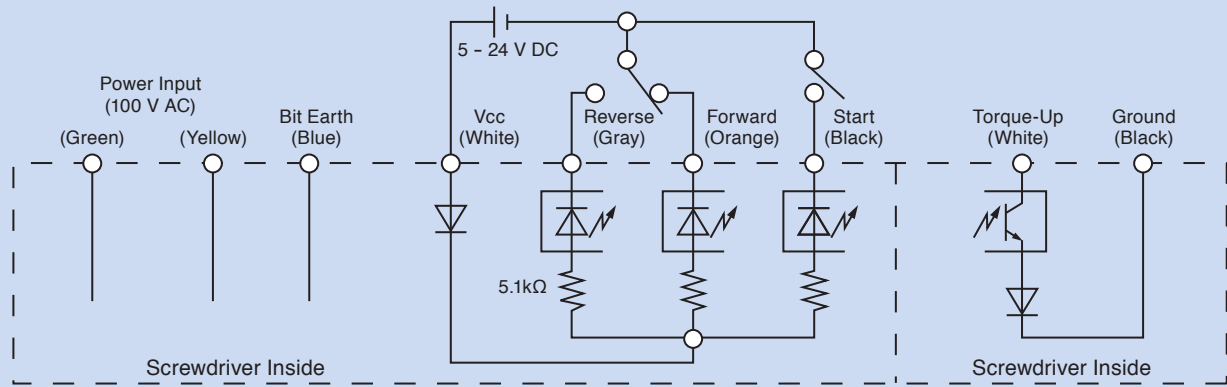

Caution


- Each input/output signal is insulated from a screwdriver's internal circuit.
- Input signal rated range: Use in the range of voltage between 5 – 24 V DC (current 0.5 – 5 mA DC)
- Torque-up signal output maximum rating: Use in the range of voltage under 30 V DC and current 20 mA DC.

Operation Timing Chart

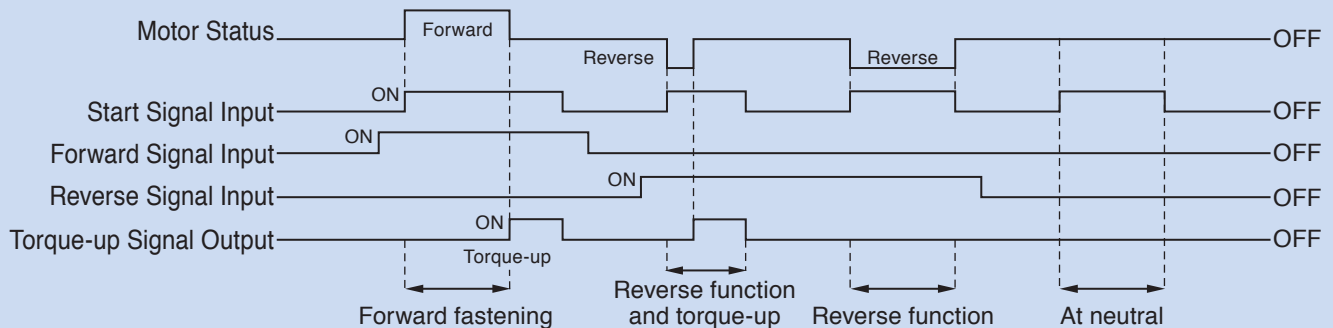


External Dimensions


•DLV30A□ A-N

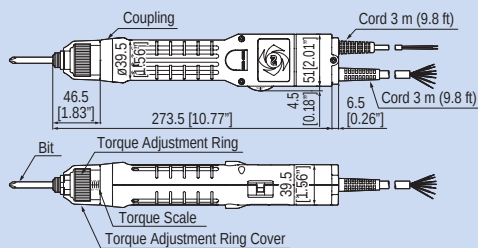


•DLV30A□ A-F

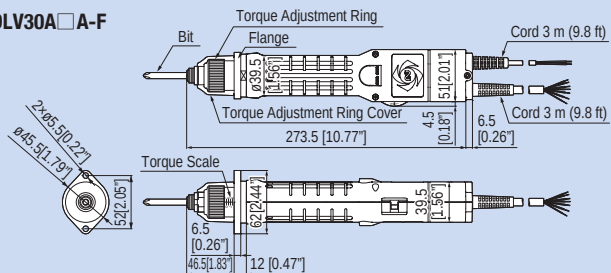


•DLV30A□ A-M

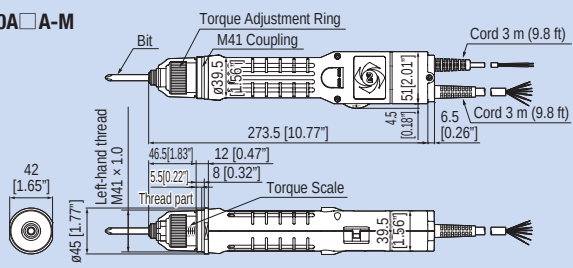


•DLP7400

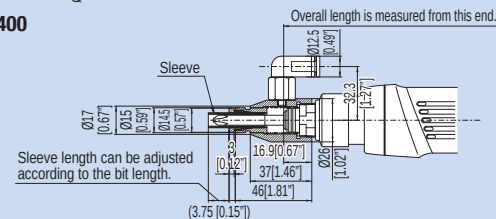


•DLV45A□ A-N/ 70A06A-N

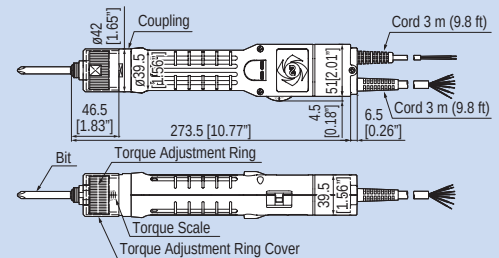

•DLV45A□ A-F/ 70A06A-F

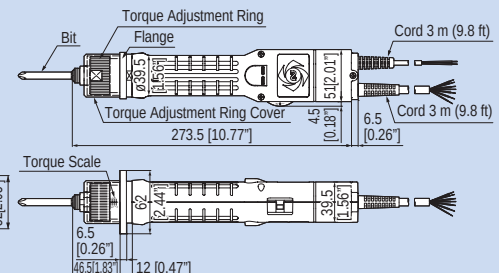

•DLV45A□ A-M/ 70A-M

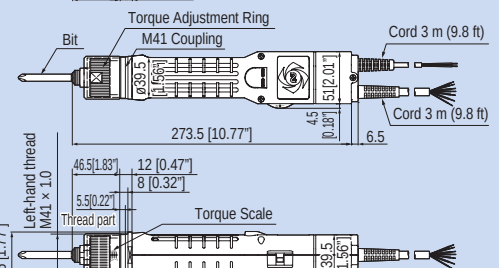

DLT1673A



DLT1973A



Features

Maintaining high assembly quality with ease

- Measured data is stored even after the power is turned off, preventing any data loss
- Energy saving type with AUTO POWER OFF function (Power is automatically turned off when left unused for 10 minutes)
- A program designed for uploading the data stored in the "delvo" torque checkers to a computer is available to download free from the NITTO KOHKI website:

www.nitto-kohki.co.jp/e/prd/e-dl/delvo.html



Click

Specifications

Model	DLT1173A	DLT1673A	DLT1973A
Measurement Range (Nm[lbf-in])	0.015 - 1.500 [0.13 - 13.3]	0.15 - 10.00 [13.5 - 88.5]	4.00 - 12.00 [35.4 - 106.2]
Calibration Precision	Within $\pm 0.5\%$ (Full Scale) For 0.2 Nm [2 lbf-in] or less ± 1 digit	Within $\pm 0.5\%$ (Full Scale) For 2 Nm [20 lbf-in] or less ± 1 digit	Within $\pm 0.5\%$ (Full Scale)
Display	4-digit digital display (Single-line)	Data sampling: 1000 times/sec.	Display rate: 12 times/sec.
Measuring Unit	kgf • cm, Nm, lbf • in (selectable)		
Data Memory	800 pieces of data		
Measuring Direction	CW and CCW		
Measuring Mode	3 modes: PD-TR-PP		
Auto Power Off	Power off if left untouched for 10 minutes		
External Output	As per USB output Mitsutoyo Digimatic		
Analog Output	Approx. 1.5 V max.	Approx. 1.0 V max.	Approx. 1.1 V max.
	No zero offset; identical waveforms produced in PP, PD, and TR modes		
Continuous Operation Time	20 hours		
External Dimensions (mm)	W160 × D110 × H47		W200 × D112 × H48.5
(inch)	[W6.3" × D4.33" × H1.85"]		[W7.9" × D4.41" × H1.89"]
Mass (g [lbs])	1100 [2.43]		1400 [3.09]
Rechargeable Battery	Nickel metal hydride battery		
Charger Type	DLE1833A		
Input Voltage for Charger	100 - 240 V AC, 50/60 Hz		
Charging Time	4 hours		
Standard Accessories	• Screw Joint (DLW4430)	• Bit Joint (DLW4360) • Spring for Joint (DLW4660)	• Soft Joint (DLW4000)

Plug Shape	Asia	Europe

Selection of Torque Checker

DLT1173A	DLT1673A	DLT1973A
DLV3300*2	DLV7100/7200/	DLV45A/70A
DLV5700	8100/8200	DLV45S/70S
DLV5800	DLV7500/8500	DLV45A/70A
DLV7300	DLV3100*3	(automation)
DLV7000/8000	DLV30A/45A	
DLV7400A	DLV30S/45S	
DLV02/12	DLV16	
DLV04C/10C	DLV7104/8104/8204	
	DLV30A/45A	
	(automation)	

*2: A reversible screwdriver is required to loosen the measuring joint.

*3: A reversible screwdriver is required to loosen the measuring joint. Screw joint is required.


Optional Accessories

	Model	Part No.	Shape	Torque Range	DLT1173A	DLT1673A	DLT1973A
Bit Joint	DLW4330	TD03305	OD 4 mm [0.16"] type	0.015 - 0.25 Nm [0.13 - 2.2 lbf-in]	○	—	—
	DLW4340	TD03306	OD 4 mm [0.16"] type	0.15 - 1.5 Nm [1.3 - 13.3 lbf-in]	○	○	—
	DLW4350	TD03307	Hex 5 [0.2"] and Hex 6.35 [1/4"] types	0.15 - 1.5 Nm [1.3 - 13.3 lbf-in]	○	○	—
	DLW4360	TD03308	Hex 5 [0.2"] and Hex 6.35 [1/4"] types	0.15 - 6.5 Nm [1.3 - 57.5 lbf-in]	—	◎	—
	DLW4430	TD03309	screw type (Bit size No.2)	0.15 - 1.5 Nm [1.3 - 13.3 lbf-in]	◎	—	—
Screw Joint	DLW4530*1	TD03310	screw type (Bit size No.2)	0.15 - 5 Nm [1.3 - 44.3 lbf-in]	—	○	—
	DLW4000	TD04123	Hex 13 [0.51"] type	4.0 - 12.0 Nm [35.4 - 106.2 lbf-in]	—	○	◎
Hard Joint	DLW4040	TD04124	(Hex. head bolt)		—	—	○
Spring	DLW4660	TV03826	Spring for DLW4340, 4350, 4430	-	○	◎	—

*1 DLW4530 must be used at 5 Nm [44.3 lbf-in] or less.

◎: Standard accessories ○: Available as option —: Unsupported

Bit Joint

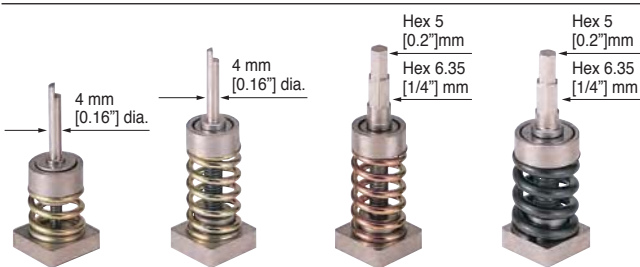

DLW4330

DLW4340

DLW4350

DLW4360

Screw Joint



DLW4430

DLW4530

Soft Joint



DLW4000

Hard Joint



DLW4040

Spring




DLW4660
(TV03826)

External Dimensions

• DLT1173A/1673A	• DLT1973A

Unit: mm [inch]

■ For DLV7400A, 5700, 5800, 7300, 7000, 8000, 3300 series




OD 4 mm Shank

Unit: mm

Model	Part No.	Size			Dimensions
		No. x	d	x L	
Phillips	NK4D	00	2	44	
				64	
				44	
				44	
		0	1.8	64	
				44	
				64	
				44	
		1	2.5	44	
				64	
				44	
				64	
Model	Part No.	W x T x L			Dimensions
		2	0.3	44	
			2.5	0.3	
			3	0.4	
			4	0.5	
Model	Part No.	H x L			Dimensions
		2	0.3	44	
			2.5	0.3	
			3	0.4	
			4	0.5	
Model	Part No.	H x d x L			Dimensions
		4	6	44	
			4.5	7	
			5	7	
			5.5	8	

■ For DLV7100, 7200, 8100, 8200, 3100, A(DLV30A) series



OD 5 mm Hex. Shank













Unit: mm

Model	Part No.	Size			Dimensions
		No. x	d	x L	
Phillips	NK31	1	4	70	
				100	
				70	
				100	
		2	5	70	
				100	
				70	
				100	
		3	6	70	
				100	
				70	
				100	
Model	Part No.	No. x L			Dimensions
		1	70	100	
			70	100	
			70	100	
			150	150	
Model	Part No.	H x d x L			Dimensions
		2	4	70	
			2.5	70	
			3	70	
			4	70	
Model	Part No.	H x L			Dimensions
		2.5	70	100	
			3	70	
			4	70	
			5	70	
Model	Part No.	H x D x d x L			Dimensions
		5.5	9	4	70
			10	4.5	70
			11	5.5	100
			13	6	70



Vacuum Pickups and Sleeves

Screwdriver series			Vacuum Pickup			Sleeve (Standard accessory)		
			Type	Model	Part No.	Model		
DLV7000/DLV8000/DLV3300			Type A	DLP6500	TD00343	DLS2124/DLS2127/DLS2130		1 piece each
DLV7400A/DLV5700/DLV5800			Type B	DLP5300	TD04342	DLS2120/DLS2124		
DLV7313				DLP7100	TD00345	DLS2122/DLS2124/DLS2127		
DLV7323/DLV7333		For Ø4 mm		DLP7200	TD00346	DLS2123/DLS2124/DLS2127		
		For HEX. 6.35 mm (1/4")		DLP7300	TD00347	DLS2135		
DLV7100/DLV7200/DLV8100/DLV8200				Type C	DLP7000	TD00344	DLS3223/DLS3225	
DLV7104/DLV8104/DLV8204			DLP7400		TD07285-0	DLS3223/DLS3225		
DLV30A		For HEX. 5 mm (M3, M4)						
DLV30S								
A series								
S series		For HEX. 6.35 mm (1/4") (M5, M6)	DLP7400	TD07286-0	DLS4220/DLS4221			
C series			Type D	DLP6600/DLP6610	TD08748/TD08751	DLS2124/DLS2127/DLS2134		
		For Ø4 mm		DLP6640/DLP6650	TD08804/TD08805	DLS4225/DLS4227		
		For HEX. 6.35 mm (1/4")						

Type	Type A	Type B	Type C		Type D			
Vacuum Pickup	DLP6500 	DLP5300/DLP7100/ DLP7200/DLP7300 	DLP7000 	DLP7400 	DLP6600 	DLP6610 	DLP6640 	DLP6650 
Sleeve	DLS2000 series (plastic) 		DLS3000 series (metal) 		DLS4000 series (metal) DLS4220/4221 			DLS4225/4227 

DLS2000 series For Ø4 mm

Sleeve						Bit (No. × d × L) (+)
Model	Part No.	ød		øD		
		mm	inch	mm	inch	
DLS2120	TD00348	2	0.08	3.5	0.14	No. 0 × 1.8 × 44
DLS2121	TD00349	2.2	0.09			
DLS2122	TD00350	2.5	0.1			
DLS2123	TD00351	2.7	0.11			
DLS2124	TD00352	3.1	0.12	4.5	0.18	No. 0 × 2.5 × 44
DLS2125	TD00353	3.3	0.13			
DLS2126	TD00354	3.5	0.14			
DLS2127	TD00355	3.7	0.15			
DLS2128	TD00356	4	0.16	5.5	0.22	No. 1 × 3 × 44
DLS2129	TD00357	4.2	0.17			No. 1 × 4 × 44
DLS2130	TD00358	4.5	0.18			
DLS2131	TD00359	4.7	0.19			6.5
DLS2132	TD00360	5.1	0.2			
DLS2133	TD00361	5.3	0.21			
DLS2134	TD00362	5.6	0.22			
DLS2135	TD00363	6.1	0.24	7	0.28	

DLS3000 series For HEX. 5 mm

Sleeve										Bit (No. × d × L) (+)	
Model	Part No.	ød		øD		ø		L			
		mm	inch	mm	inch	mm	inch	mm	inch		
DLS3222	TD00364	5.6	0.22	7	0.28	5	0.2	34	1.34	No. 1 × 5 × 70	
DLS3223	TD05024	6.1	0.24	9	0.35					No. 2 × 6 × 70	
DLS3224	TD00365	6.4	0.25								
DLS3225	TD00366	7.1	0.28								
DLS3226	TD00367	4.6	0.18	7	0.28	18	0.71	65	2.56	No. 1 × 4 × 100	
DLS3227	TD00368	5.1	0.2								
DLS3228	TD00369	5.6	0.22			9	0.35				
DLS3229	TD00370	6.1	0.24	No. 2 × 6 × 100							
DLS3230	TD00371	6.4	0.25								
DLS3231	TD00372	7.1	0.28								

DLS4000 series For HEX. 6.35 mm (1/4")

Sleeve										Bit (No. × d × L) (+)
Model	Part No.	ød		øD		ø		L		
		mm	inch	mm	inch	mm	inch	mm	inch	
DLS4220	TD08001	9.1	0.36	11	0.43	5	0.2	6	0.24	No. 2 × 7 × 75
DLS4221	TD08002	10.6	0.42	12.5	0.49	5.5	0.22	7	0.28	
DLS4225	TD09344	4.6	0.18	7	0.28					No. 1 × 4 × 75
DLS4227	TD09345	5.6	0.22							

Accessories

Tool Balancer



Easy to adjust tension by using handle.

Model	TW-06R	TW-1R	RW-3	RW-5
Capacity (g [lbs])	200 - 600 [0.44 - 1.32]	500 - 1500 [1.1 - 3.31]	1000 - 3000 [2.2 - 6.61]	2500 - 5000 [5.51 - 11.02]
Stroke (m [inch])	1.5 [59"]		2 [78.7"]	
Mass (g [lbs])	300 [0.66]		700 [1.54]	900 [1.98]

Vacuum Pump DLP2500 series



Electric Screwdrivers can be used with Vacuum Pump and Vacuum Pickup. The sleeve of Vacuum Pickup sucks the screw and holds it on the bit, enabling the operator to pick it up with the tool itself, thus improving operational efficiency and operator's productivity.

Model	DLP2530	DLP2570
Features	Standard	With CE mark
Voltage	100 V AC, 50/60 Hz	230 V AC, 50/60 Hz
Power Consumption (W)	30(50 Hz), 26(60 Hz)	
Achievable Vacuum (kPa)	-21.3	
Flow Rate (at Outlet) (L/min)	24(50 Hz), 26(60 Hz)	
Screw Size (mm)	4 or less	
Mass (g [lbs])	3800 [8.38]	


Pistol Grip DLW2300/2300ESD

(for DLV7100, 7200, 8100, 8200, 7500, 8500, 30/45/70-IKE, S(DLV30S/45S/70S) series and A(DLV30A/45A/70A) series Electric Screwdrivers)



Easy-to-attach grip suitable for horizontal operation.

Shaker Box Made of Anti-electrostatic Resin

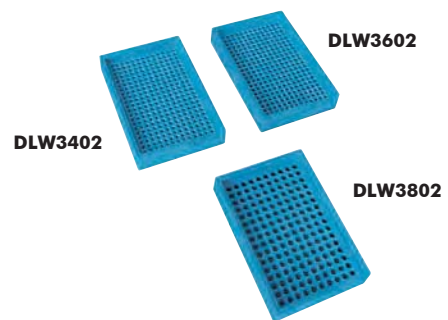

The screws will fall into the heads-up position for easier vacuum or magnetic pickup.

The anti-electrostatic resin greatly reduces static build-up and dust attached to the shaker box.

Model	DLW3402	DLW3602	DLW3802
Part No.	TD04110	TD04111	TD04112
Hole Pitch (mm [inch])	6 [0.24"]		8 [0.31"]
Hole Depth (mm [inch])	13.5 [0.53"]		12.5 [0.49"]
No. of Holes	273	273	160
Screw Size (mm)	1.7 - 2	2 - 2.6	3 - 4

Torque Adjustment Ring Cover



Fits over torque adjustment cover to minimize tampering or accidental turning once the torque is set.

Model	Part No.	Applicable Screwdriver
DLW5200	TD00331	DLV7100, 7200, 8100 and 8200 series
DLW5201*1	TD05639	DLV7100, 7200, 8100 series and DLV30A (Transformerless Type)
DLW5202	TD08486	DLV45S/70S and DLV45A/70A
DLW5203	TD09222	DLV30S and DLV30A (Low Voltage Type)
DLW5300	TD00332	DLV7301, 7000, 8000 series (for 4 mm bit)
DLW5400	TD01883	DLV7301 series (for 6.35 mm bit)
DLW5500	TD00333	DLV7303 series (for 4 mm & 6.35 mm bit)
DLW5600	TD00334	DLV7500, 8500 series
DLW5700	TD02875	DLV5700, 5800, 7400A series
-	TV07315	DLV02/12/16SL-BKE series
-	TV06787	DLV02/12/16SL-CKE series

*1: As this is a clear plastic cover, torque scale can be seen even after mounted on the screwdriver.

Flanged Coupling DLW9011

(for DLV7100, 7200, 8100, and 8200 series Electric Screwdrivers)


*Can not be mounted on SPC type



Provides a flange which enables the operator to apply axial pressure through the heel of the hand.

Accessories


Torque Reaction Arm

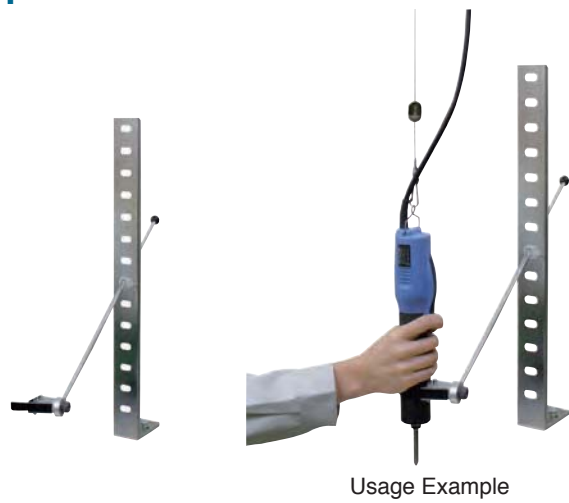

For enhanced productivity and prevention of operator's repetitive motion injury, a torque reaction arm should be used all together.

Part No.	Decription	Applicable Screwdriver
TD06180	Torque Reaction Arm	A series(DLV30A/45A/70A) S series(DLV30S/45S/70S)

Optional Cord

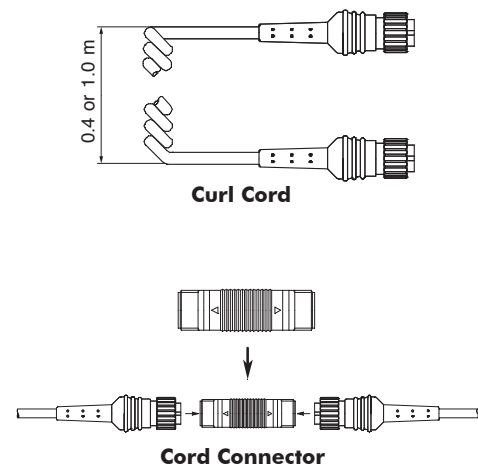

Please inquire of the distributor for the price and minimum quantity on each optional cord.

Part No.	Optional Cord	Applied Models	Length (m)
TD02826	5P to 6P Exchange Cord*1	DLV7300 series	0.1
TD02548	Extension Cord For 5P		3.0
TD03159	Extension Cord For 6P		2.0
TD01882	Curl Cord	DLV7500/8500 series	0.4
TD02820	Curl Cord		1.0
TD02438	Cord Connector DLW9100		

*1: "5P to 6P Exchange Cord" is used to connect "5-prong Screwdriver" to "6-prong Controller".

SAFETY GUIDE

Be sure to read and understand the following safety notations and all safety precautions.



WARNING:

Indicates a potentially hazardous situation which, if failure to comply with the instructions given, could result in serious injury or death.



CAUTION:

Indicates a potentially hazardous situation which, if failure to comply with the instructions given, could result in injury or material damage.

Safety Precautions

- Be sure to follow the safety precautions to keep accidents such as fires, electroshock, and injuries from occurring.
- Before using your tool, please read this manual carefully so that you may use it properly to get the most out of it.
- Keep the manual handy – so you can use it whenever necessary.



WARNING

- Keep work area clean. Cluttered work areas and benches invite accidents and injuries.
- Consider proper working environments for each tool carefully. Do not expose electric tools to extreme amounts of moisture or direct contact with water or rain. Keep area well lit at all times to prevent hidden dangers and never operate the equipment near flammable liquids or in gaseous or explosive atmospheres.
- Prevent operators from electric shock. When using electric tools, prevent body contact with grounded surfaces (e.g. pipes and outer frames of radiators, microwave ovens, and refrigerators, etc.).
- Keep all electric tools and power cords away from children and all unauthorized personnel. Also all visitors should be kept away from work area.
- Properly store tools and accessories while not in use. They should be kept in a dry, locked-up location out of reach of children or unauthorized personnel.
- Do not force tool. It will do the job better and more safely at the rate for which it was intended.
- Use the right electric power tool that can complete the job within its specifications. Do not attempt to adapt improper attachments or accessories to complete a job. Do not use the tool for other than what they were designed for.
- Dress properly. Do not wear loose clothing and/or accessories. (gloves, necklace etc.) They can be caught in moving parts. Non-skid footwear is recommended in outdoor operation. Wear protecting hair covering to contain long hair.
- Always wear safety glasses during operation. Wear respiratory protection when working in an environment where dust particles are generated during operation.
- Do not abuse cord. Never carry tool by cord or yank it to disconnect from receptacle. Keep cord from heat, oil, and sharp edges.
- Use clamps or a vise to secure the work piece tightly and eliminate vibration. Never hold the work piece with your hands, keep both hands on the electric tool for increased productivity.
- Do not overreach. Keep proper footing and balance at all times.
- Maintain tools with care. For safe and efficient work, use the proper bit and check it regularly. Do not use the bit with a worn out or deformed tip. When oiling and replacing parts, follow the instructions given by the instruction manual. Inspect tool cords periodically and if damaged, have them replaced by an authorized service facility. Keep handles dry, clean, and free from oil and grease.
- Disconnect a tool or a controller when not in use, when repairing, or when changing accessories and bits, etc.
- Remove adjusting keys and wrenches. Form habit of checking to see that keys and adjusting wrenches are removed from tools before turning it on.
- Always avoid an unexpected start by having all power switches in the off position prior to attaching to a power supply. Never carry tools with your finger on the on/off switch when the power is attached. Never plug the cord into a receptacle while your finger is on the on/off switch.
- When the tool is used outdoors, use an electric extension cord or cable suitable for outdoor use.
- Stay alert. Watch what you are doing. When using electric tools, take good care of tool handling, working manner, and surrounding conditions. Use common sense. Do not operate tool when you are tired.
- Check damaged parts. Before further use of the tool, an accessory or other part that is damaged should be carefully checked to determine that it will operate properly and perform its intended functions. Check for alignment of moving parts, binding of moving parts, breakage of parts, mounting, and any other conditions that may affect its operation. When repairing or replacing parts, follow the directions of the instruction manual. The part that is damaged should be properly repaired or replaced by an authorized service facility unless otherwise indicated elsewhere in this operation manual. Have defective switches replaced by an authorized service facility. Do not use the tool if the switch cannot be turned on and off.
- Use only recommended accessories and attachments as per tool operator manual and “delvo” general catalog. Use of improper accessories and attachments may result in an accident or serious injury.
- Any repairs on the tool should be performed only by an authorized service facility. Do not modify the tool that is complying with the safety standard. If the repairman who has poor knowledge and skill repairs the tool, the tool may not give a good performance and result in an increased risk of injury to the user.
- The power source must be limited to the individual tools specifications as stated on the nameplate or instruction manual. If used at a higher or lower voltage than indicated, it may cause failure and result in an increased risk of injury to the user.
- Before work operation carefully check if there are underground installations such as conduit, water pipe, and gas pipe, etc. If a tool should touch them, it might cause electric shock, electric leak, or gas leak.
- Hold the tool body firmly so as not to be swung by it when using. If not, this may cause injury.
- Do not bring hand or face close to moving parts such as bit etc. when using. This may cause injury.
- When you have dropped the tool by mistake, carefully check the tool if there is breakage, cracks or deformation. This may cause injury.



CAUTION

- Install bits or accessories securely in accordance with the operation manual. Insufficient installation may cause injury.
- Whenever setting the torque, unplug the cable of the tools. Adjusting the torque setting during rotation may cause injury.
- When operating a tool at high places, check that there is no person under the places. Do not stumble over the cord nor drop the material or tool body. This may cause injury.
- Never leave a tool running unattended on the working bench or floor. Always turn the power switch or lever to the off position and disconnect from the power source when not in use.
- Do not overload to the extent that the motor locks or the clutch malfunctions. This may cause smoke, fire, failure or injury.
- If the tool is overheating or functioning abnormally, stop using the screwdriver immediately and inspect it to see whether any repairs are necessary. Otherwise this may cause failure or injury.
- The electric screwdriver may overheat depending on the type of screw, type of screw-tightened material, or frequency of use. To avoid overheating, stop operating the screwdriver for a time or use several drivers in alternation. Overheating may reduce the life of the product or cause failure or injury.
- The fastening torque may vary depending on how the product is operated or held, the type of screw, and the fastening conditions. Use a torque wrench or similar tool to check that the fastening torque is appropriate.



Electric Screwdrivers

The logo for delvo is registered trademark or a trademark of Nitto Kohki Co., Ltd. in Japan, the United States and/or certain other countries.

NITTO KOHKI CO., LTD.

Head Office

9-4, Nakaikagami 2-chome, Ohta-ku, Tokyo 146-8555, Japan

Tel : +81-3-3755-1111 Fax : +81-3-3753-8791 E-mail : overseas@nitto-kohki.co.jp

Web www.nitto-kohki.co.jp/e



ISO 9001
JQA-2025
ISO 14001
JQA-EM4057
H.Q./R&D Lab

Overseas Affiliates / Offices

NITTO KOHKI U.S.A., INC.

46 Chancellor Drive, Roselle, Illinois 60172, U.S.A.

For Tool

Tel : +1-630-924-9393 Fax : +1-630-924-0303

For Cupla

Tel : +1-630-924-5959 Fax : +1-630-924-1174

For Pump

Tel : +1-630-924-8811 Fax : +1-630-924-0808

www.nittokohki.com/

NITTO KOHKI CO., LTD. Mexico Representative Office

Torre Corporativo 1 Piso 11 Central Park Armando Birlain Shaffler

#2001 Col Centro Sur, Queretaro, Qro, C.P. 76090, Mexico

Tel : +52-442-290-1234

NITTO KOHKI EUROPE GMBH

Gottlieb-Daimler-Str. 10, 71144 Steinenbronn, Germany

Tel : +49-7157-989555-0 Fax : +49-7157-989555-40

www.nitto-kohki.eu/

NITTO KOHKI EUROPE GMBH UK Branch

Unit A5, Langham Park Industrial Estate, Maple Road,
Castle Donington, Derbyshire DE74 2UT, United Kingdom

Tel : +44-1332-653800 Fax : +44-1332-987273

www.nitto-kohki.eu/

NITTO KOHKI CO., LTD. India Liaison Office

3rd Floor, Building No.9-A DLF Cyber City, Phase-III,

Gurgaon, Haryana 122002, India

Tel : +91-124-454-5031 Fax : +65-6227-0192

NITTO KOHKI CO., LTD. Singapore Branch

10 Ubi Crescent #01-62, Ubi Techpark Lobby D, Singapore 408564

Tel : +65-6227-5360 Fax : +65-6227-0192

www.nitto-kohki.co.jp/e/nksb/index.html

NITTO KOHKI CO., LTD. Bangkok Representative Office

M&A Business Center, Q-House Convent Bldg.,

38 Convent Rd., Silom, Bangrak, Bangkok 10500, Thailand

Tel : +66-2632-0307 Fax : +66-2632-0308

www.nittobkk.com/

NITTO KOHKI AUSTRALIA PTY LTD

77 Brandl Street, Eight Mile Plains, Queensland 4113, Australia

Tel : +61-7-3340-4600 Fax : +61-7-3340-4640

www.nitto-australia.com.au/

NITTO KOHKI (SHANGHAI) CO., LTD.

Room1506, Suite C, Orient International Plaza,

No.85 Loushanguan Road, Shanghai 200336, China

Tel : +86-21-6415-3935 Fax : +86-21-6472-6957

www.nitto-kohki.cn/

NITTO KOHKI (SHANGHAI) CO., LTD. Shenzhen Branch

2005C Shenzhen ICC Tower, Fuhuasanlu 168,

Futian District, Shenzhen, Guangdong 518048, China

Tel : +86-755-8375-2185 Fax : +86-755-8375-2187

www.nitto-kohki.cn/

DISTRIBUTED BY



SINTAER

C/Montserrat nº 100 local.

08760 - Martorell

Tel. +34 937 736 633

www.sintaer.com